BROAN®

Chimney


BW50 SERIES

Featuring timeless design that has become an icon of European style, this chimney hood offers bright LED lighting that illuminates the cooktop.

SIZE	MODEL NO.	GREASE FILTERS (replacement)	NON-DUCTED CHARCOAL FILTERS
29-1/2-in.	BW5030SSL	S97018027 (set of 2)	ROUNDFILTER
35-7/16-in.	BW5036SSL	S97018028 (set of 3)	ROUNDFILTER

FEATURES	
Max. Blower Airflow	380 CFM*
Finish	430 Stainless Steel no. 4 Brushed
Wall Mount	Yes
Telescopic Flue	Yes - Accomodates 8-ft. to 9-ft. ceilings
Convertible to non-ducted operation	Yes - Non-Duct Kit RK58 sold separately
Blower type	Single, Centrifugal
Cord-connected	Yes
Control type	5-Pushbuttons • Blower on-off • Blower low speed • Blower medium speed • Blower high speed • Light on-off
Lighting	2 x LED Modules 5.5 W, (included)
Grease Filters	Dishwasher-safe with quick-release latch
AC INPUT	
120V, 60 Hz - 2.6 AMPS	
OPTIONAL ACCESSORIES (sold separately)	
Flue Extension for 10-ft. ceiling	FXN58SS
Non-Duct Kit	RK58
MINIMUM MOUNTING HEIGHT	
30-in. from cooktop to bottom of hood	
LIMITED WARRANTY	
1-year	
FOR INDOOR USE ONLY	



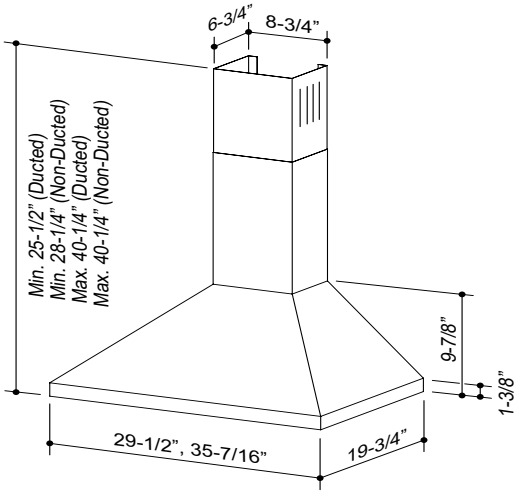


Dimensions shown in inches.

c UL us

99529076C

Broan-NuTone LLC | 926 West State Street, Hartford, WI 53027 | 1 800-558-1711 | www.Broan-NuTone.com

HVI PERFORMANCE									
Duct Orientation	Size	Damper	Sones			CFM			
			Normal	Medium*	High	Normal	Medium*	High 0.25 in. w.g.	High 0.1 in. w.g.
Round - Vertical	6 in.	Included	1.5	3.5	8.5	130	220	325	350

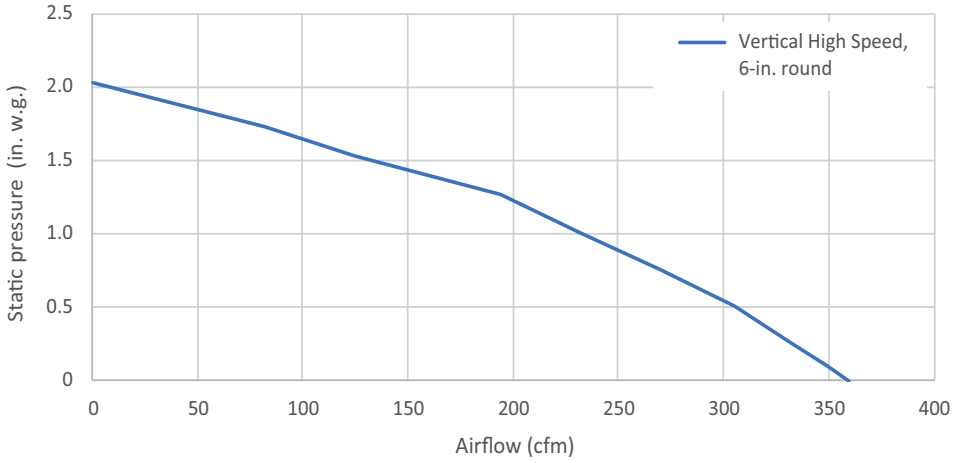

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

* Where noted performance rating is not HVI certified.

Broan-NuTone LLC | 926 West State Street, Hartford, WI 53027 | 1 800-558-1711 | www.Broan-NuTone.com