Blomberg
seit 1883

# 24" 1.95 cu.ft. Front Load Washer, ENERGY STAR®

# WM72200W



ENERGY STAR

## Key Features & Benefits

### Large Capacity
This Large Capacity Washer lets you clean more in a single load, saving both time and energy while delivering perfect washing results.

### Allergen Cycle
The Allergen Cycle utilizes high water temperatures to break down and eliminate allergens like pollen, dust, cigarette smoke, and pet dander, ensuring a cleaner, healthier wash.

### Quick Wash
When time is tight and you need your outfit washed in a hurry, Blomberg's Quick Wash Cycle delivers super-fast results for smaller loads—so you can move on without worry.

### ENERGY STAR®
Blomberg believes that conscious living should extend to clothing care. That's why we bring intelligent energy and water conservation to the laundry room. All our washers are ENERGY STAR® certified and feature automatic water adjustment for every load, ensuring efficiency and sustainability.

| GENERAL PROPERTIES | |
|---|---|
| Drum Material | Stainless Steel |
| Style | Front Loading |
| Capacity | 1.95 cu.ft. |
| Connectivity | N/A |
| Stackable | Yes |
| Matching Dyer | DV17600W |
| **MAIN FEATURES** | |
| Maximum Spin Speed | 1,200 RPM |
| Variable Spin Speed | Yes |
| Unbalance Detection System | Yes |
| Automatic Temperature Control | Yes |
| Interior Light | No |
| Leak Protection System | Yes |
| Automatic Water Adjustment System | Yes |
| Delay Start Time | 0-19 Hours |
| Time Remaining Indicator | Yes |
| Dispenser Drawer | Yes |
| Door Lock Indicator | Yes |
| Child Lock | Yes |
| Adjustable Leveling Legs | 4 |
| **DIMENSIONS** | |
| # of Wash Cycles | 15 |
| Cotton/Normal | Yes |
| Permanent Press | Yes |
| Heavy Duty | Yes |
| Mixed Fabric | Yes |
| Alergen | Yes |
| Rinse | Yes |
| Spin & Drain | Yes |
| Tub Sanitize | Yes |
| Hand Wash/Wool | Yes |
| Down Wear | Yes |
| CoolClean | Yes |
| Delicates/Dark | Yes |
| Sportswear | Yes |
| Organic | Yes |
| Quick Wash | Yes |
| **DIMENSIONS** | |
| Product Dimensions (H x W x D) | 33 5/64" x 23 5/8" x 21 1/4" |
| Product Weight | 154.3 lbs. |
| **TECHNICAL DETAILS** | |
| Motor | Optimal Inverter |
| Voltage | 120 V |
| Frequency | 60 Hz |
| Rated Current Amps | 10 Amp |
| Plug | Wall Receptacle |
| **EFFICIENCY** | |
| ENERGY STAR® Certified | Yes |
| Annual Energy Consumption (kWh/year) | 86 |

Canada: www.blombergappliances.ca
USA: www.blombergappliances.com

Blomberg
seit 1883


© 2026 Beko US Inc. All Rights Reserved 02.18.26


Blomberg
seit 1883

## 24" 1.95 cu.ft. Front Load Washer, ENERGY STAR®


# WM72200W

## Dimensions and Installation

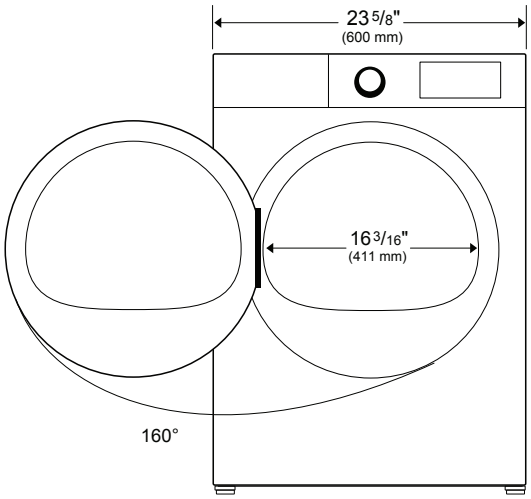

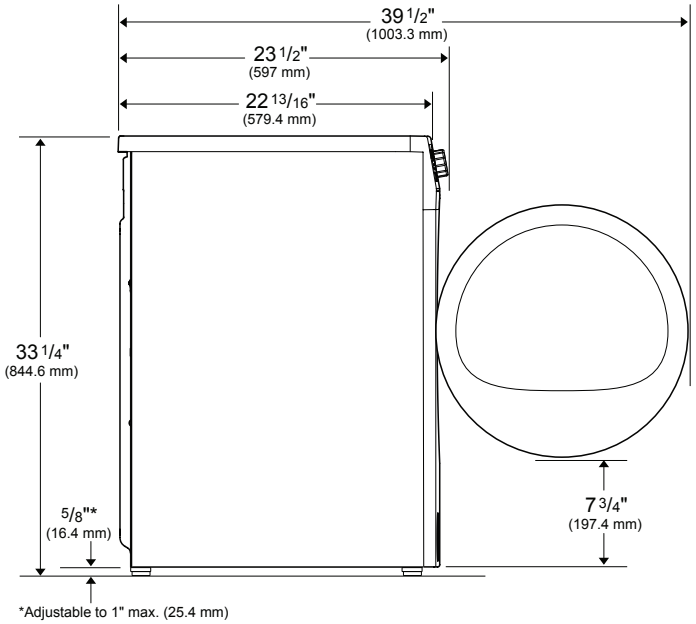


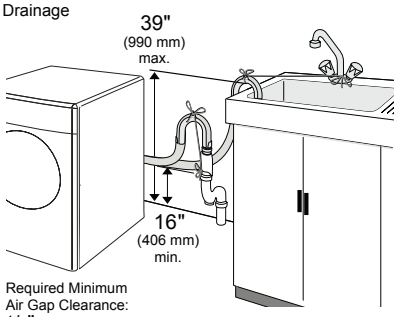

Drainage




Required Minimum
Air Gap Clearance:
1/2" (13 mm) Top
1/2" (13 mm) Sides
1/2" (13 mm) Back

Water Supply Connection



| 1 YEAR | 2 YEARS |
|---|---|
| FULL WARRANTY | PARTS WARRANTY |

NOTE TO THE INSTALLER: All height, width and depth dimensions are shown in inches (as well as metric). Beko US Inc., reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website (Canada) www.blombergappliances.ca / (USA) www.blombergappliances.com to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.

Canada: www.blombergappliances.ca
USA: www.blombergappliances.com

Blomberg
seit 1883

© 2026 Beko US Inc. All Rights Reserved 02.18.26


# 24" 1.95 cu.ft. Front Load Washer, ENERGY STAR®

**WM72200W**

## Dimensions and Installation

### Clearances for Undercounter Installation

Only Washer

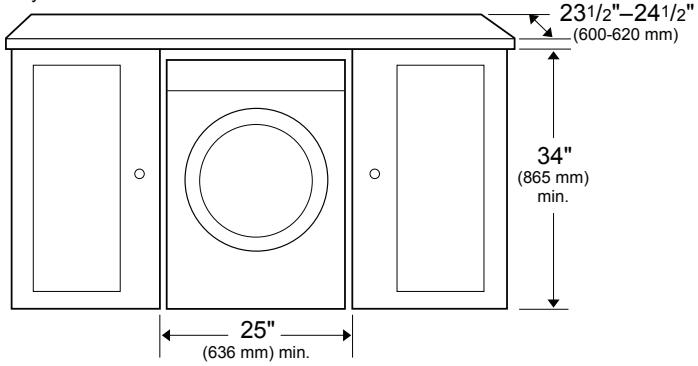



Required Minimum Clearances:
(Stand Alone, Side by Side, or Stacked)

| Washer | Vented Dryer | Heat Pump Dryer |
|---|---|---|
| Top: 1" (25 mm) | Top: 1" (25 mm) | Top: 1" (25 mm) |
| Sides: 1/2" (13 mm) | Sides: 3/16" (4 mm) | Sides: 1/2" (13 mm) |
| Rear: 1/2" (13 mm) | Rear: 4" (101.6 mm) | Rear: 1/2" (13 mm) |
| Front: xxxxx | Front: 3/16" (5 mm) | Front: 3/16" (5 mm) |

### Clearances for Undercounter Installation


Both Washer and Vented Dryer

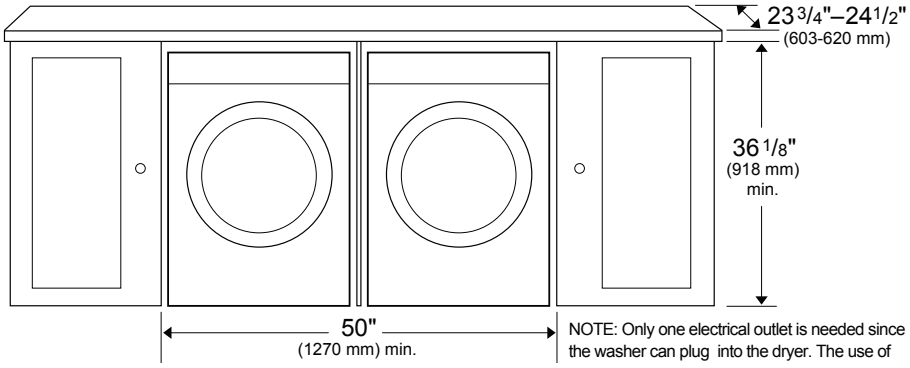


NOTE: Only one electrical outlet is needed since the washer can plug into the dryer. The use of

### Clearances for Undercounter Installation

Both Washer and Heat Pump Dryer

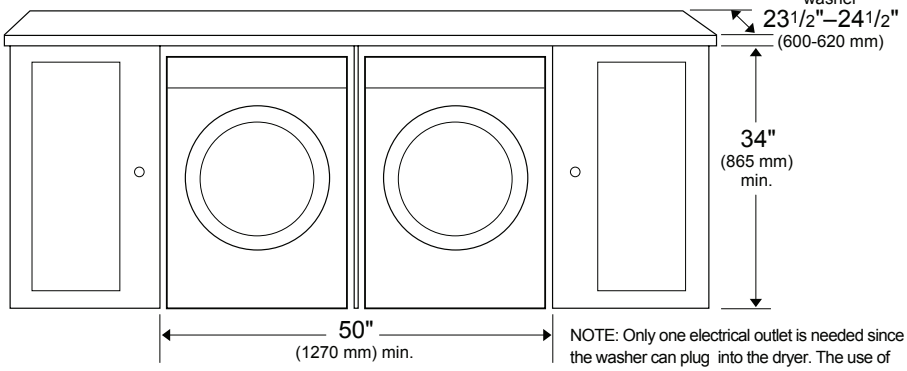


NOTE: Only one electrical outlet is needed since the washer can plug into the dryer. The use of

**Closet Door Ventilation Requirement**

Washer:
A louver having minimum 23 in2 (148 cm2) air opening located at 3 in (7.62 cm) distance from the bottom of closet door.

Vented Dryer:
A louver having minimum 46 in2 (297 cm2) air opening located at 3 in (7.62 cm) distance from the top of closet door.

Heat Pump Dryer:
Closet door must have 2 openings, one located 3.2 inches (8 cm) from bottom of door having a minimum area of 16 in2 (103 cm2) and the other one located 3 inches (7.5 cm) from top of door having a minimum area of 46 in2 (294 cm2).




© 2026 Beko US Inc. All Rights Reserved 02.18.26


Blomberg
seit 1883

## 24" 1.95 cu.ft. Front Load Washer, ENERGY STAR®

# WM72200W

## Dimensions and Installation

Stacked Installation – Washer and Vented Dryer

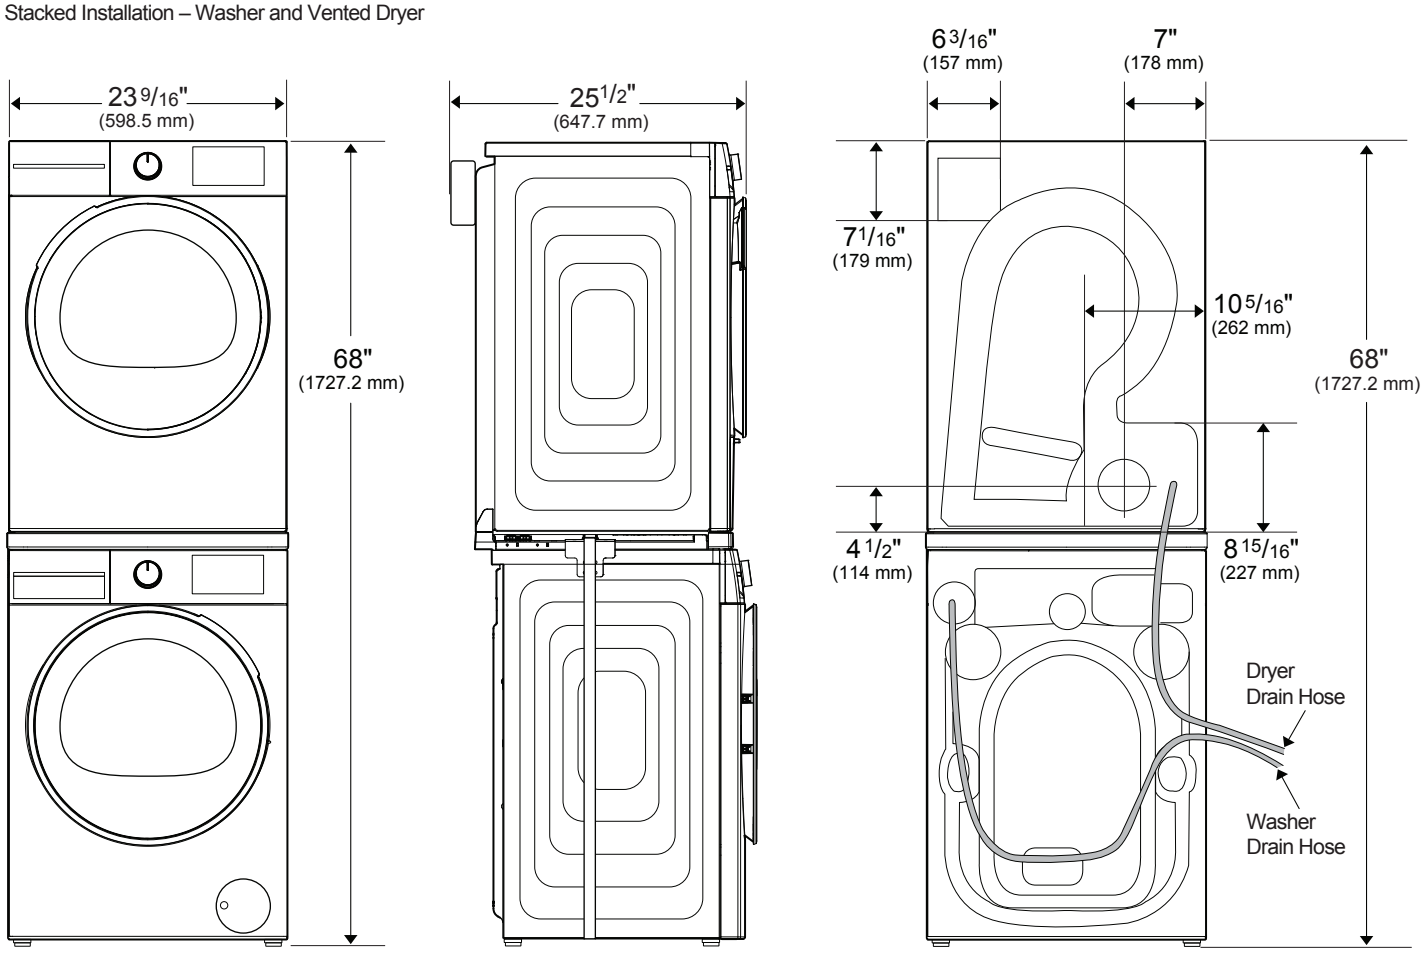


NOTE: Only one electrical outlet is needed since the washer can plug into the dryer. The use of two electrical outlets may be used as an alternative.




© 2026 Beko US Inc. All Rights Reserved 02.18.26



Blomberg
seit 1883


Blomberg
seit 1883

## 24" 1.95 cu.ft. Front Load Washer, ENERGY STAR®


# WM72200W

## Dimensions and Installation

Stacked Installation in Closet or Enclosed Space – Washer and Vented Dryer

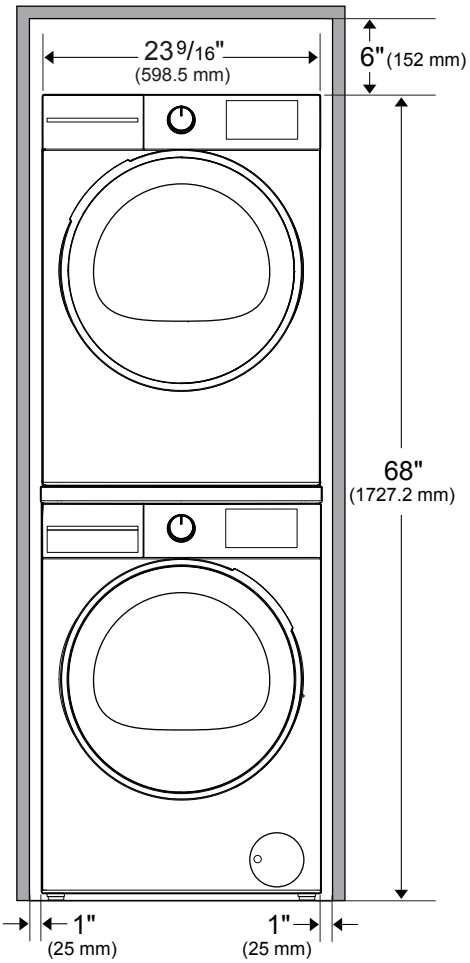



NOTE: Only one electrical outlet is needed since the washer can plug into the dryer. The use of two electrical outlets may be used as an alternative.

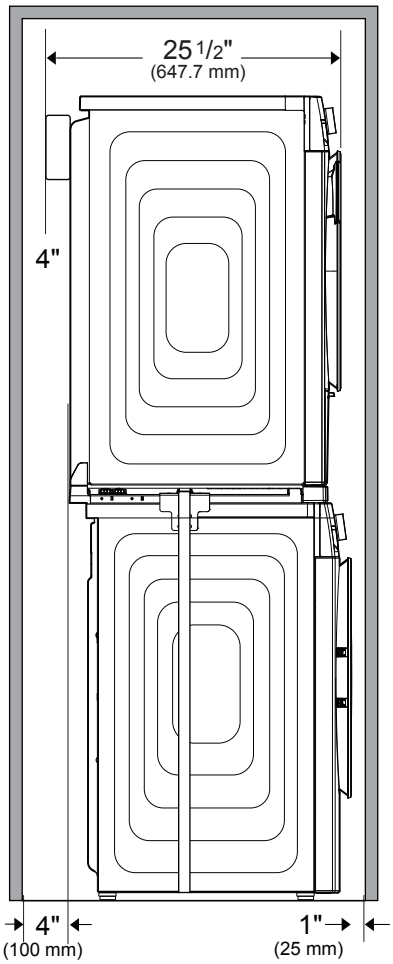


NOTE: The 4" clearance that is required should be measured from the back of the dryer cabinet, NOT from the junction box located at the top rear of the dryer.

NOTE: The 4" clearance is NOT measured from the back of the washer cabinet.

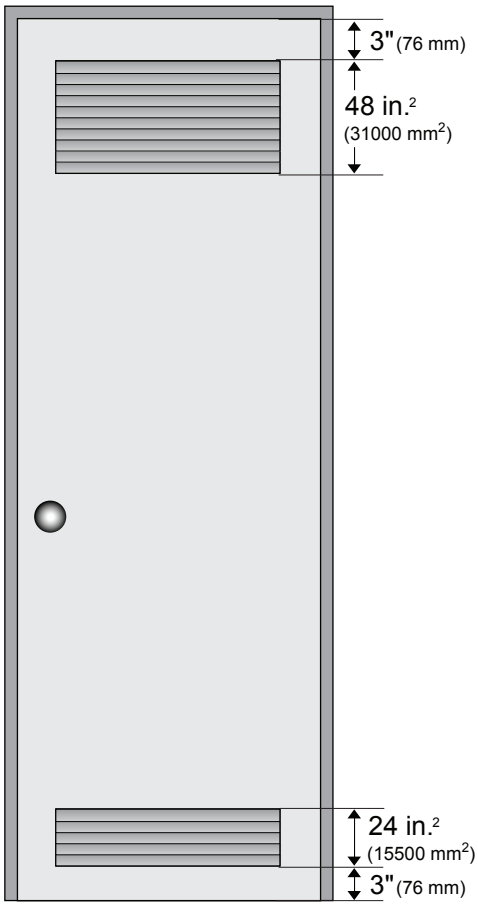


NOTE: The front of the closet must have two unobstructed air openings for a combined minimum total area of 72 sq.in. (465 sq.cm) with a minimum clearance of 3 in. (76 mm) at the top and bottom. A slatted door with equivalent space clearance is acceptable.




© 2026 Beko US Inc. All Rights Reserved 02.18.26



Blomberg
seit 1883