# Café™ 30" Custom Speed Cook Oven with 120V Advantium® Technology

CSB913P4VW2 / CSB913P2VS1 / CSB913P3VD1 / CSB913M2VS5



ADA COMPLIANT

**ALSO AVAILABLE IN**

CSB913P2VS1
Stainless Steel with Brushed Stainless handle

CSB913P3VD1
Matte Black with Brushed Stainless handle

## FEATURES & BENEFITS

Unmatched versatility to unleash your imagination - Enjoy a whole new level of cooking flexibility with a single oven that can be used in five different ways. Use it as a Convection Oven, Microwave, Toaster Oven, Warming/ Proofing Oven, and Speed Cook Oven with Advantium Technology

Cook smarter, not longer - Achieve oven-quality results in a fraction of the time as True European Convection, microwave and the energy from light work together to provide the exact amount and type of heat your food needs, precisely when it needs it

Brighten up life in the kitchen - Easily navigate wall oven settings using a stunning full color display that adds an unexpected touch of style to your kitchen

Say goodbye to rubbery leftovers - Achieve crispy results at microwave speed with more than 20 reheat programs that make leftovers taste like new

The perfect marriage of quality and speed - Eliminate the need for preheating and cook your favorite foods two to four times faster than a conventional oven

You've got an eye for perfect timing - Monitor the progress of dishes with an in-oven camera that provides a view of your food from your smartphone

Create a look that matches your personal style - Select any combination of premium finishes and hardware options to create a stunning look customized to any owner's taste

Clean-up has never been easier - Keep your oven looking like new at all times with steam clean

The perfect fit you've always dreamed of - When you're updating your kitchen, attention to detail is a priority. That's why Café Advantium wall ovens are guaranteed for an exact fit for an easy and seamless replacement.

## APPEARANCE

| | |
|---|---|
| Color Appearance | Matte White |
| Handle | Café Minimal Style Only for Model# CSB913M2VS5 |

## FEATURES

| | |
|---|---|
| Cooking Modes | Speed Cook; Crisp Reheat; Convection; Microwave; Proof; Warm |
| Style | Built-In |
| Control Type | 7" Full Color LCD Touch Control |
| Interior Oven Light | Yes |
| Oven Interior | Stainless Steel |
| Microwave Watts (IEC-705) | 975 |
| Turntable Size | 16 in |
| Control Features | Add 30 Sec; Over 175 Programmed Menu Selections; Oven Camera |
| Cooking Technology | 5 in 1 Oven with 120V Advantium |
| Oven Rack Features | Pedestal Rack |

## CAPACITY

| | |
|---|---|
| Total Capacity (Cubic Feet) | 1.7 |

## POWER / RATINGS

| | |
|---|---|
| Electrical Input - 120V Amperage | 15 |
| Electrical Input - 120V Watts | 1800 |
| Volts/Hertz | 120V; 60Hz |
| Broiler Wattage | 1200W |

## WEIGHTS & DIMENSIONS

| | |
|---|---|
| Approximate Shipping Weight | 102.2 lb |
| Cavity (W x H x D) | 20-1/16 x 8-1/2 x 17 in |
| Height (Front) | 20-1/4 in |
| Net Weight | 84.6 lb |
| Overall Height | 20-1/4 in |
| Overall Width | 29-3/4 in |
| Overall Depth (Includes Control Panel Thickness) | 22-3/4 in |
| Cabinet Width | 30 in |

## ACCESSORIES

| | |
|---|---|
| Metal Oven Pan | Yes - Precision Cooking Tray |

# Café™ 30" Five in One Oven with 120V Advantium® Technology

CSB913P4VW2 / CSB913P2VS1 / CSB913P3VD1 / CSB913M2VS5

## WARRANTY

| | |
|---|---|
| Parts Warranty | Limited 1-Year Entire Appliance<br>Limited 5-Year Magnetron Tube |
| Labor Warranty | Limited 1-Year Entire Appliance |
| Warranty Notes | See Written Warranty for Full Details |

## DIMENSIONS AND INSTALLATION INFORMATION


**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

**Note:** 2" minimum between cutouts when installed above warming drawer or single wall oven.


**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

**Note:** Advantium 120 volt models can be installed under 36 inch height countertops. Advantium 240 volt models cannot.


**Note:** Use of the accessory drawer will replace the bottom trim piece for applicable installations. Please see installation instructions for full details.

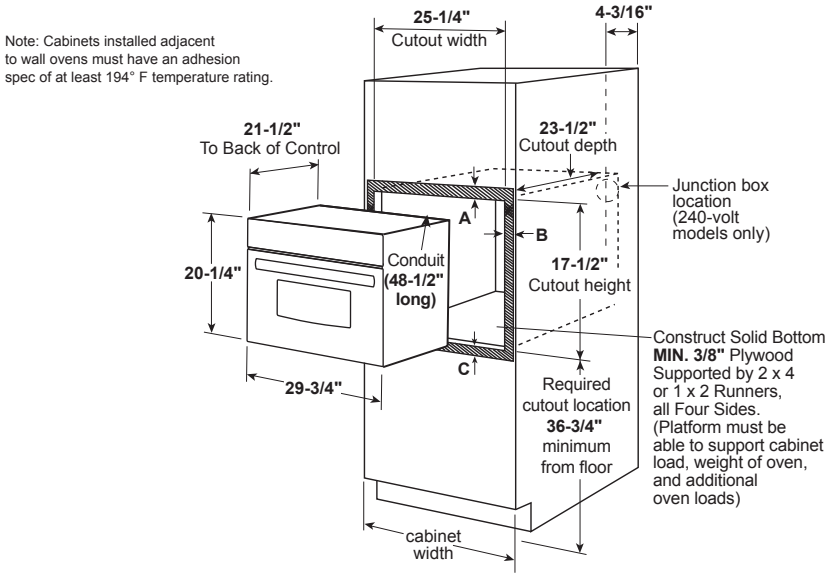



A = The unit overlap is **1-3/4"** but allow **1-7/8"** clearance from top edge of cutout
B = The unit overlap is **2-1/4"** but allow **2-3/8"** clearance from side edges of cutout
C = The unit overlap is **1"** but allow **1-1/8"** clearance from bottom edge of cutout

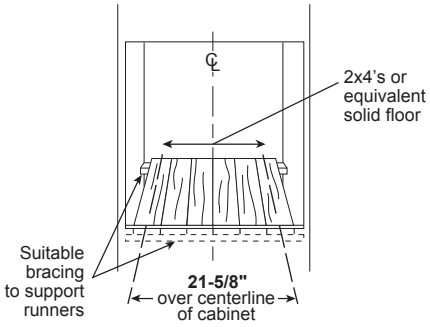


(Platform must be able to support cabinet load, weight of oven, and additional oven loads)

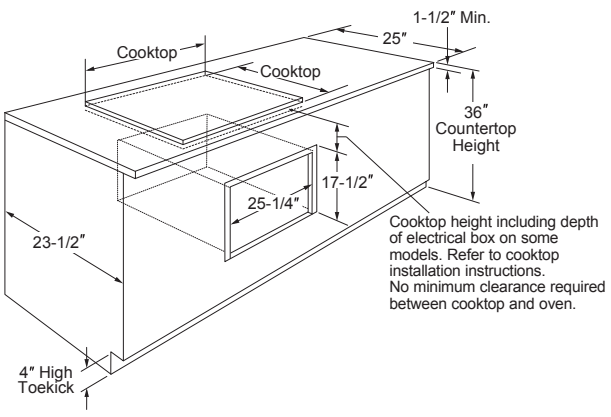


Cooktop height including depth of electrical box on some models. Refer to cooktop installation instructions. No minimum clearance required between cooktop and oven.

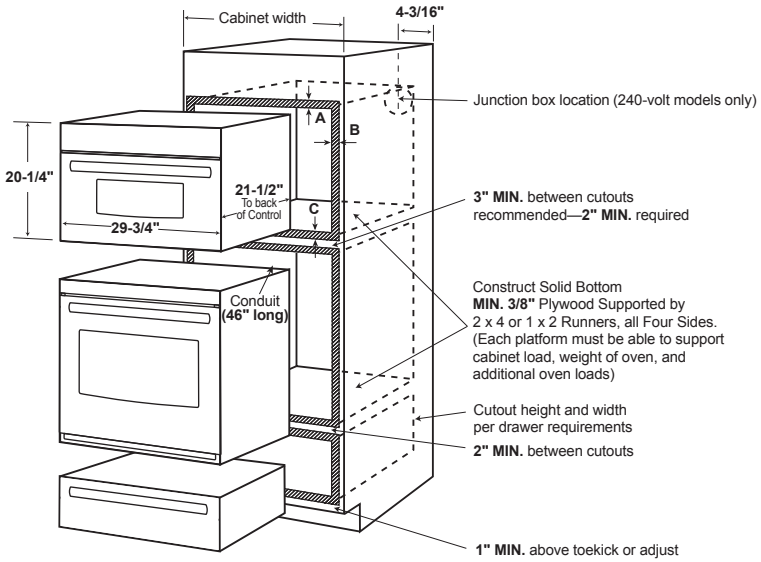

# Café™ 30" Five in One Oven with 120V Advantium® Technology

CSB913P4VW2 / CSB913P2VS1 / CSB913P3VD1 / CSB913M2VS5


## DIMENSIONS AND INSTALLATION INFORMATION

**Prepare the opening:** The Advantium Built-In Oven can be installed in combination with other appliances. Always follow each product's Installation Instructions to compete the installation.

**Single oven installation:** Order a 30" wide single oven cabinet or cut the opening in a wall to the dimensions shown.

* For existing cutouts, a maximum width of 28-1/2" is acceptable. If the opening is slightly wider, secure a furring strip on each side of the cutout for securing the oven.

- Always maintain 36-3/4" minimum height from the floor to the cutout in any single or combined installation.
- The unit overlap on the top is 1–3/4" but allow 1–7/8" clearance from top edge of cutout. The unit overlap on each side is 2–1/4" but allow 2–3/8" clearance from side edges of cutout. The unit overlap on the bottom is 1" but allow 1–1/8" clearance from bottom edge of cutout.
- Oven overlaps will conceal cut edges on all sides of the opening.

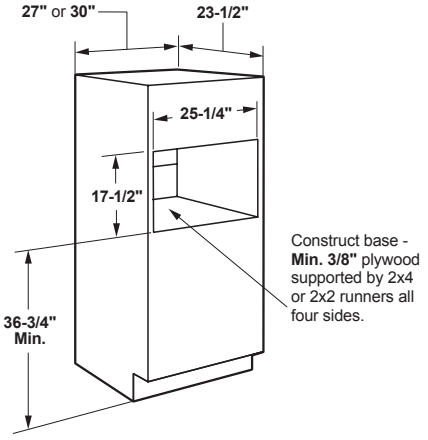


### Preparation with a Warming Drawer


When installed over a single oven or a warming drawer, allow at least 2" between the two openings. This separation will provide clearance for bottom overlap of the Advantium Built-In Oven and the other appliance overlaps. Construct a solid oven floor of 3/8" min. thick plywood supported by 2 x 4 or 2 x 2 runners on all sides.

- The support must be level and rigidly mounted, flush with the bottom edge of the cutout.

* For existing cutouts, a maximum width of 28-1/2" is acceptable. If the opening is slightly wider, secure a furring strip on each side of the cutout for securing the oven.

**Note:** Additional clearances between the cutouts may be required. Check to be sure the oven supports above the Warming Drawer location do not obstruct the required interior depth and height. See Warming Drawer installation instructions for details.

Installation over Warming Drawer:

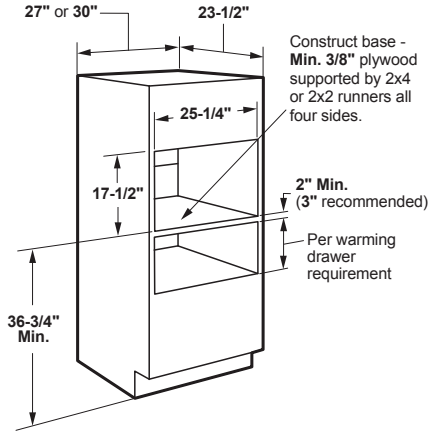



### Installation Over a Wall Oven and Warming Drawer:

* For existing cutouts, a maximum width of 28-1/2" is acceptable. If the opening is slightly wider, secure a furring strip on each side of the cutout for securing the oven.

**Note:** Additional clearances between the cutouts may be required. Check to be sure the oven supports above the Warming Drawer location do not obstruct the required interior depth and height. See Warming Drawer installation instructions for details.

**Caution:** For personal safety, the mounting surface must be capable of supporting the cabinet load, in addition to the added weight of the oven and drawer, plus additional oven loads.


Installation over a Wall Oven and Warming Drawer:

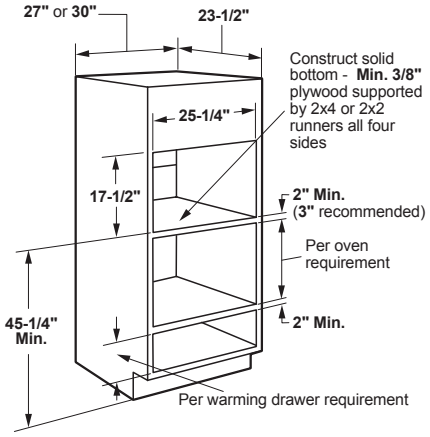


## ADDITIONAL ACCESSORIES



CXWS0H0PMBZ
Brushed Bronze
1 handle
(Standard on Matte White)



CXWS0H0PMSS
Brushed Stainless
1 handle
(Standard on Matte Black)



CXWS0H0PMBT
Brushed Black
1 handle



CXWS0H0PMCU
Brushed Copper
1 handle



CXWS0H0PMCG
Brushed Brass
1 handle



CXWS0H0PMFB
Flat Black
1 handle



© 2025 GE Appliances 