800 Series, Dual Fuel Freestanding Range, 36", Stainless Steel HDS8857UC



- **Industrial-Chic Design**
- **A QuietClose Door that never slams**
- **Ergonomic tilted display**: makes viewing the screen more ergonomic while cooking and is sleek and stylish
- **Support heavy dishes with a Telescopic Rack**
- **Even cooking**


HEZ9LLUC	Range Feet Premium 30/36, SS
HEZ9TK36UC	Range Toe Kick 36, SS
HEZ9YZ36UC	Range Low Back Guard 36" SS Model
HEZ9ZZ36UC	Range Island Trim Ext. 36" SS Models

UPC code: 825225975212
Product color: ..... Stainless Steel
Gas type preset: .....Natural gas 15 mbar (USA)
Total NG BTUs: ..... 23000 Btu
Watts: ..... 3300 W
Fuse protection: .....20 A
Volts: ..... 240/208 V
Frequency: ..... 60 Hz
Required Cutout Size (HxWxD) (in): .....36" width slide-in
Overall Appliance Dimensions (HxWxD) (in): .....36" x 35 15/16" x 24 14/16"
Variable cooker height (in): ..... 1"
Product Packaging Dimensions (HxWxD): ..... 34 1/16" x 38 3/4" x 28"
Net Weight: ..... 297.000 lbs
Gross Weight: .....341.000 lbs


4 242005 510580

800 Series, Dual Fuel Freestanding Range, 36", Stainless Steel HDS8857UC

Measurements in inches (mm)

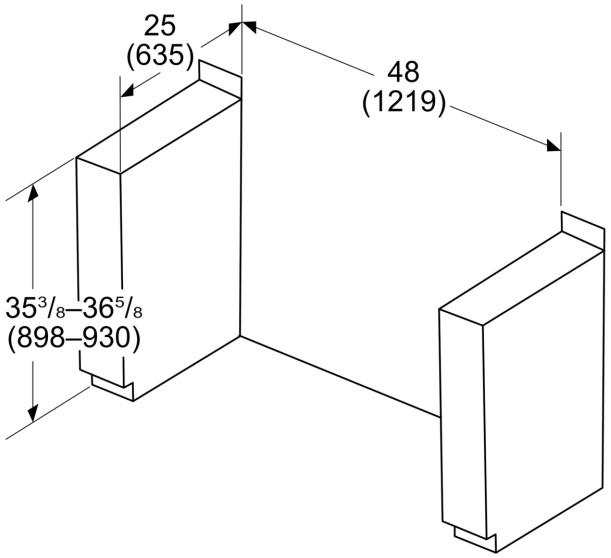

Cabinet clearance requirements



The distance that must be maintained when installing the range shall be:

B: Min. 18″ (457 mm)
C: Min. 30″ (762 mm) clearance between the top of the cooking surface and the bottom of the ventilation hood or a non-combustible wall cabinet

Min. 36″ (914 mm) clearance between the top of the cooking surface and the bottom of a combustible wall cabinet

D: Min. 48″ (1219 mm)
E: Min. 25″ (635 mm)
F: Max. 13″ (330 mm)
G: Min. 48″ (1219 mm)
Zero clearance between adjacent combustible structure below the countertop surface and sides of the appliance
H: 35 3/8″–36 5/8″(898–930 mm)
I: Max. 11″ (279 mm)
J: Max. 7″ (178 mm)
K: Max. 6″ (150 mm)
L: Max. 11″ (279 mm)

X: Grounded outlet
Y: Gas supply line

From cooking surface to side materials: no clearance is required from unit walls to adjacent vertical combustible walls on rear, right or left