# JTD3000DN/EN/SN

*GE® 30" Smart Built-In Self-Clean Double Wall Oven*

## DIMENSIONS AND INSTALLATION INFORMATION


**NOTE:** Wall coverings, countertops and cabinets surrounding the wall oven must be able to withstand a temperature of up to 200°F (94°C).

**NOTE:** If the cabinet in which the wall oven is installed does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. The runners and braces must support up to 400 lbs (181 kg).

**NOTE:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.


**ATTENTION INSTALLER:** Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

**IMPORTANT:** Before installing, consult installation instructions packed with product for current dimensional data.

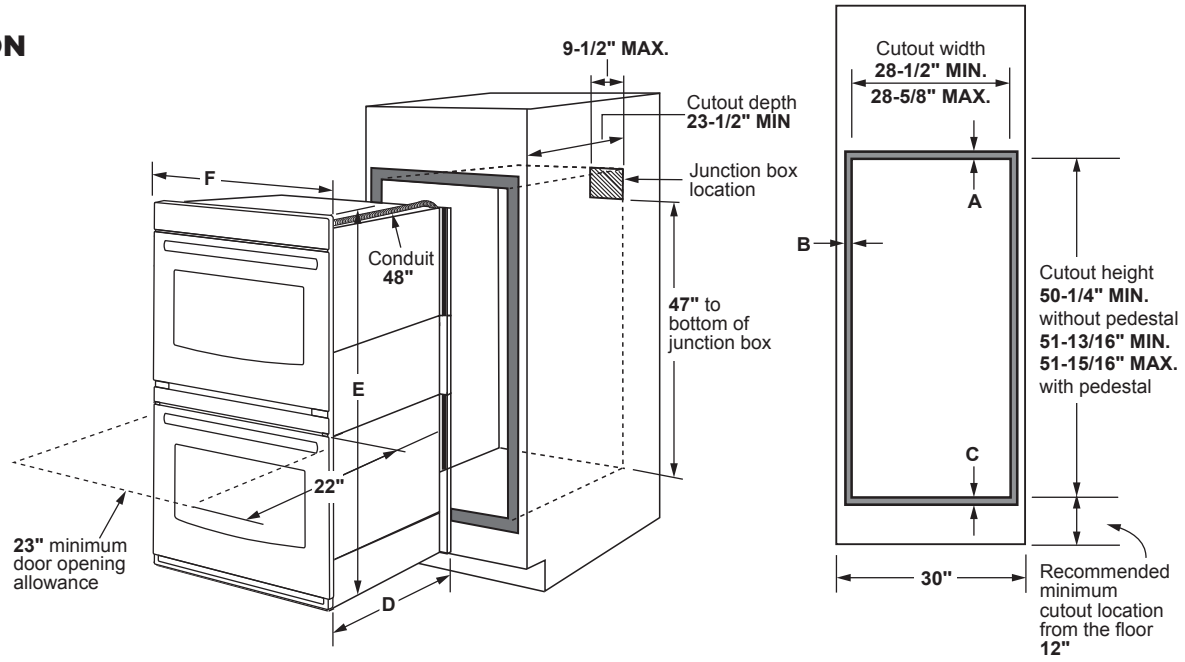


Dimension and installation information are shown in inches.

| KW RATING | |
|---|---|
| 240V | 8.4 |
| 208V | 6.3 |
| **BREAKER SIZE** | |
| 240V | 40 Amps |
| 208V | 40 Amps |

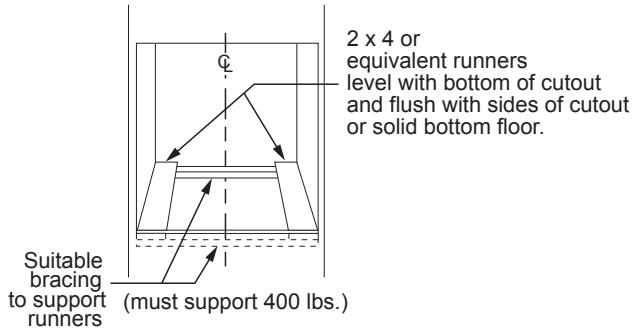


| | JTD3000 |
|---|---|
| **Cabinet** | **30"** |
| A - Overlap of oven at top of cutout | **1"** |
| B - Overlap of oven other side of edge of cutout | **3/4"** |
| C - Overlap of oven at bottom of cutout | **1-1/4"** |
| **Oven** | |
| D - Install depth | **23-1/2"** |
| E - Overall height with trim | **53"** |
| F - Overall width | **29-3/4"** |

GE APPLIANCES

*For answers to your GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.*

GE APPLIANCES FIT GUARANTEE

Listed by Underwriters Laboratories

Specification Revised 9/20

# JTD3000DN/EN/SN

*GE® 30" Smart Built-In Self-Clean Double Wall Oven*

## DIMENSIONS AND INSTALLATION INFORMATION

**NOTE:** 30" Double electric wall ovens are approved for installation above 27" and 30" warming drawers.


**ATTENTION INSTALLER:** Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

**IMPORTANT:** Before installing, consult installation instructions packed with ALL products for current dimensional and combination data.

**WHEN TO USE THE PEDESTAL RAILS:** When replacing an older GE Appliances 30" double wall oven with a new GE Appliances model. Cutout Height = 51-13/16" to 51-15/16". This is our traditional cutout height.

**WHEN NOT TO USE THE PEDESTAL RAILS:** When replacing a 30" double wall oven from another manufacturer (ie; Whirlpool) with a new GE Appliances model. Cutout height = 50-1/4". You will need to verify that the existing cutout matches the 50-1/4" dimension.

If the new GE Appliances 30" double wall oven is being installed into new construction (ie; not a replacement), then the recommended installation is to use the pedestal rails.

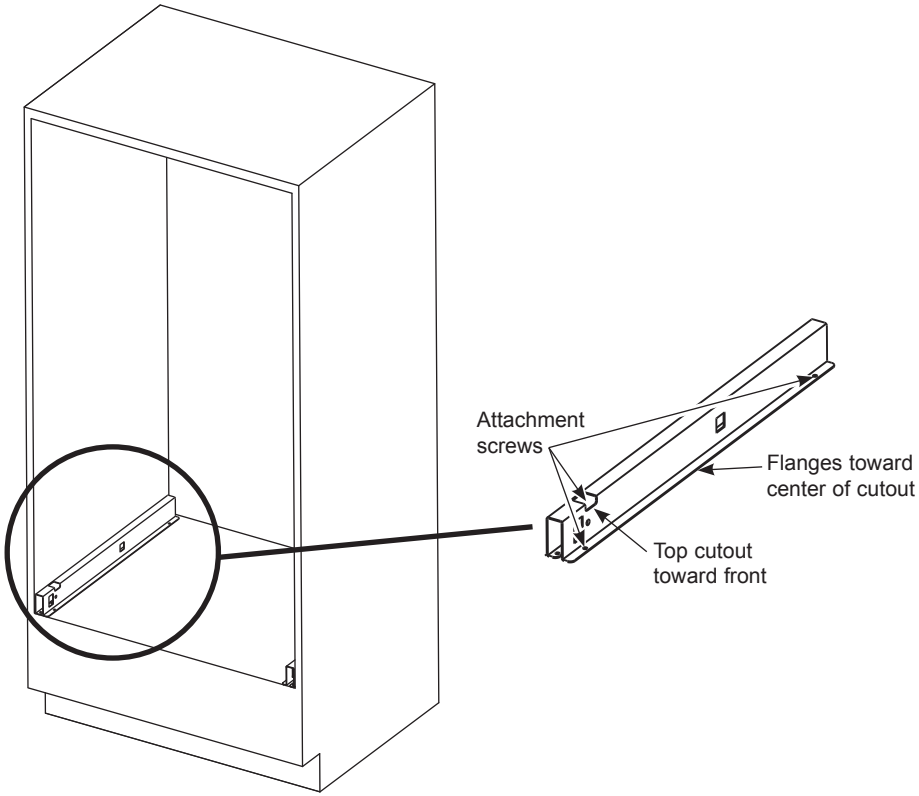


GE APPLIANCES

*For answers to your GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.*

Specification Revised 9/20

# JTD3000DN/EN/SN

*GE® 30" Smart Built-In Self-Clean Double Wall Oven*

## FEATURES AND BENEFITS

Heavy-duty racks

Easy-clean controls

Self-clean with optional Steam Clean

Anywhere control with remote notifications

Scan-to-cook

10-pass hidden bake element

8-pass broil element


Fit Guarantee

Model JTD3000DNBB – Black

Model JTD3000DNWW – White

Model JTD3000ENES – Slate

Model JTD3000SNSS – Stainless Steel

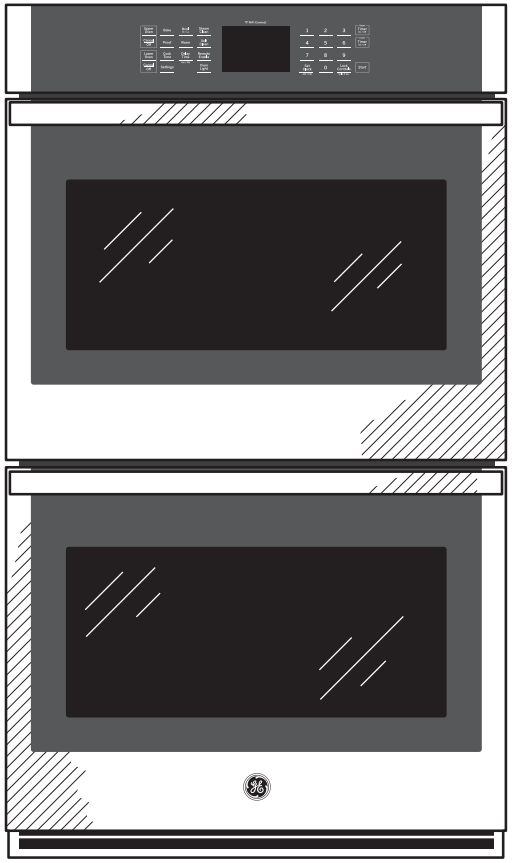

## FIT GUARANTEE

Replacing a similar wall oven from GE Appliances or another brand? GE wall ovens are guaranteed for an exact fit or GE Appliances will pay up to $300 toward modifications.

Visit geappliances.com for more info

GE APPLIANCES

Specification Revised 9/20