JVX3300SJ

GE® 30" Under-the-Cabinet Hood


DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

WB02X11537 replacement grease filter and JXCF53 replacement charcoal filter are available at additional cost. Call toll-free 800.626.2000.


INSTALLATION INFORMATION: Before installing, consult installation instructions packed with product for current dimensional data.

ADDITIONAL ACCESSORY:
JXS50SS 15" cabinet spacer

AMP RATING	
120V	2.5

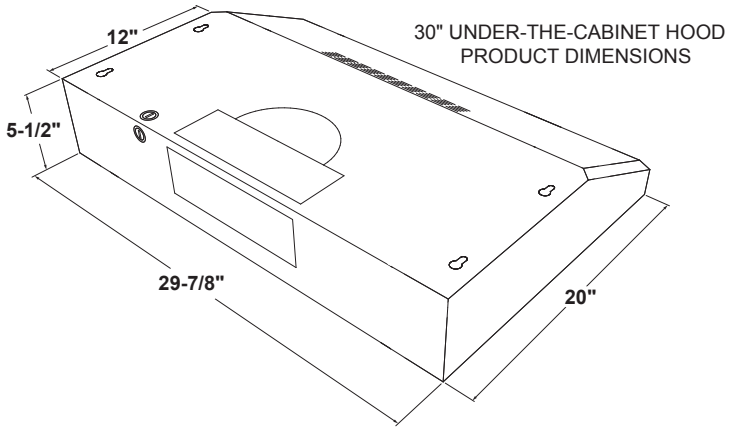

30" UNDER-THE-CABINET HOOD
PRODUCT DIMENSIONS

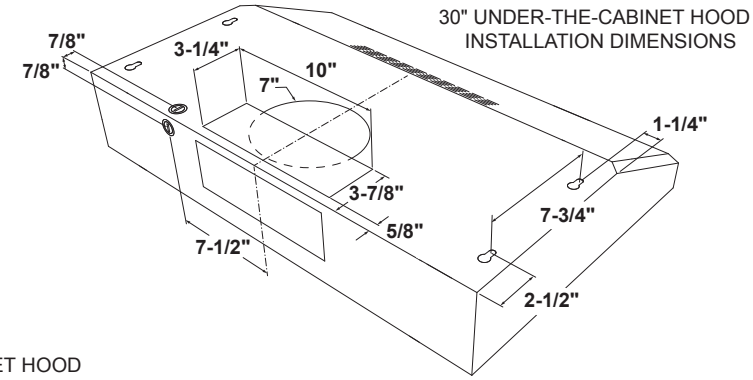

30" UNDER-THE-CABINET HOOD
INSTALLATION DIMENSIONS

Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.

GE APPLIANCES

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.

ADA COMPLIANT

Listed by Underwriters Laboratories

AHAM VERIFIDE

Specification Revised 10/25

JVX3300SJ

GE® 30" Under-the-Cabinet Hood

FEATURES AND BENEFITS

Easy installation – 10 minutes or less by one person

Two-speed, 200 CFM venting system – Removes smoke, grease, odors and moisture



Front controls – Enjoy easy access and a subtle appearance

Cooktop lighting - Illuminate cooking space and surrounding surface

Convertible venting options – Select recirculating or external venting

Vertical and rear exhaust – Exhausts from the top or rear of the hood

Appearance (Partially enclosed bottom) – Enjoy easy access to hood interior

Dishwasher-safe filter – Filters grease and is dishwasher-safe

Wall Switch Option — Convertible for wall switch use and ADA-compliant operation

Model JVX3300SJSS – Stainless steel

CFM/SONES RATINGS	
Exhaust High Speed (HS)	200/6.5
Exhaust Low Speed (LS)	130/5.0

GE APPLIANCES

For answers to your Monogram, Café™, GE Profile™ or
GE Appliances product questions, visit our website at geappliances.com
or call GE Answer Center® Service, 800.626.2000.

Specification Revised 10/25