Specifications

Commercial Top-Load Dryer - Non-Coin



CEM2795JQ / CGM2795JQ

Why Buy: Choose a commercial-built product that withstands heavy traffic, regular use, and performs continuously.

Commercial-Grade Cabinet

The robust cabinet is made from heavy-gauge galvanized steel to provide long-lasting protection, with an easy-to-remove front panel for streamlined service.

Full-Wrap Console

The metal console wraps completely around the back of the machine, making it easy to clean, and offering optimal protection against unexpected liquid spills or vapor.

Reversible, 180° Wide-Opening, Side-Swing Door

The side-swing door gives unhindered access for loading and unloading, while the 180° opening gives optimal flexibility in any space. Made from heavy-gauge, galvanized steel, it's designed for regular use.

2-YEAR LIMITED PARTS ONLY WARRANTY / 90-DAY LABOR

For 90 days from the date of the original purchase, when this commercial appliance is installed, maintained, and operated according to instructions attached to or furnished with the product, Whirlpool Corporation (hereafter "Whirlpool") will pay for factory-specified replacement parts and repair labor to correct defects in materials or workmanship that existed when this commercial appliance was purchased. For the first two years from the date of purchase, when this major appliance is installed, maintained, and operated according to the instructions attached to or furnished with the product, Whirlpool will pay for factory-specified replacement parts to correct defects in materials or workmanship that existed when this commercial appliance was purchased.
See whirlpoolcommerciallaundry.com for warranty details.

®/™ © 2019 Whirlpool. All rights reserved.

Specifications

Commercial Top-Load Dryer - Non-Coin


Electric Dryer CEM2795JQ & Gas Dryer CGM2795JQ At A Glance:

- 7.4 cu. ft.
- 3 cycles, 3 temperatures
- Non-coin
- Reversible, 180° wide-opening, side-swing door
- Four-roller suspension
- Galvanized, heavy-gauge cabinet
- 1/3-HP motor
- Removable, door-mounted lint screen
- Card reader compatible*
- 2-Year Limited Parts Warranty/90-Day Labor**


MODEL — Non-Coin	CEM2795JQ	CGM2795JQ
	U.S.	U.S.
Fuel Type	Electric	Gas
SPECIFICATIONS		
CAPACITY		
Cylinder Volume — cu. ft. (liters)	7.4 (210)	7.4 (210)
Cylinder Diameter — in. (mm)	26.26 (667)	26.26 (667)
Cylinder Depth — in. (mm)	23.2 (590)	23.2 (590)
ELECTRICAL REQUIREMENTS		
Voltage	240V	120V
Electrical Requirements / Frequency	60Hz	60Hz
Breaker / Fuse — amps†	30	15
AIRFLOW (CFM)	178	183
DRYER EXHAUST DUCT DIAMETER — IN. (MM)††	4 (101.6)	4 (101.6)
ELECTRIC HEATING ELEMENT (WATTS)	5,600	5,600
GAS RATING — BTU/HR. (KCAL/HR.)	22,000 (5,544)	22,000 (5,544)
GAS INLET SIZE	N/A	3/8 N.P.T
MOTOR SIZE — HP (KW)	1/3 (.25)	1/3 (.25)
DIMENSIONS		
MACHINE DIMENSIONS		
Width (with door closed) — in. (mm)	27 (686)	27 (686)
Depth — in. (mm)	29.25 (743)	29.25 (743)
Height — in. (mm)	41 (1,042)	41 (1,042)
Door Opening — in. (mm)	20.25 (514)	20.25 (514)
CRATED DIMENSIONS		
Crated Width — in. (mm)	28.8 (731)	28.8 (731)
Crated Depth — in. (mm)	30.8 (782)	30.8 (782)
Crated Height — in. (mm)	44.65 (1,134)	44.65 (1,134)
APPROXIMATE WEIGHT		
Uncrated — lbs. (kg)	115 (52.2)	120 (54.4)
Crated — lbs. (kg)	125 (56.7)	139 (59)

Dimensions are for planning purposes only. See specific instructions for proper installation.
Because of continuous product improvement, Whirlpool reserves the right to change specifications without notice.

Side View

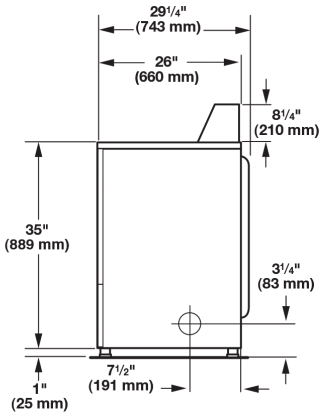

Back View

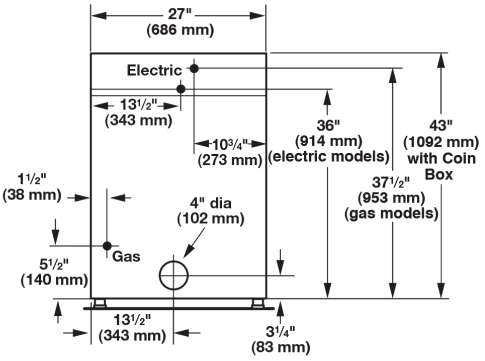

*Card readers are not supplied or sold by Whirlpool Corporation and must be purchased separately.

**Visit whirlpoolcommerciallaundry.com for complete warranty details.

†It is recommended that a separate circuit serving for this dryer be provided.

††Use 4" (100mm) diameter rigid aluminum or galvanized steel duct. Never use plastic, non-metal, or combustible duct.

See Installation Guide for complete dimension details.

®/™ © 2019 Whirlpool. All rights reserved. Printed in the U.S.A.