
# AZHS07DRXXA

## GE Zoneline® Heat Pump Unit with ICR, 230/208 Volt

### Features & Benefits

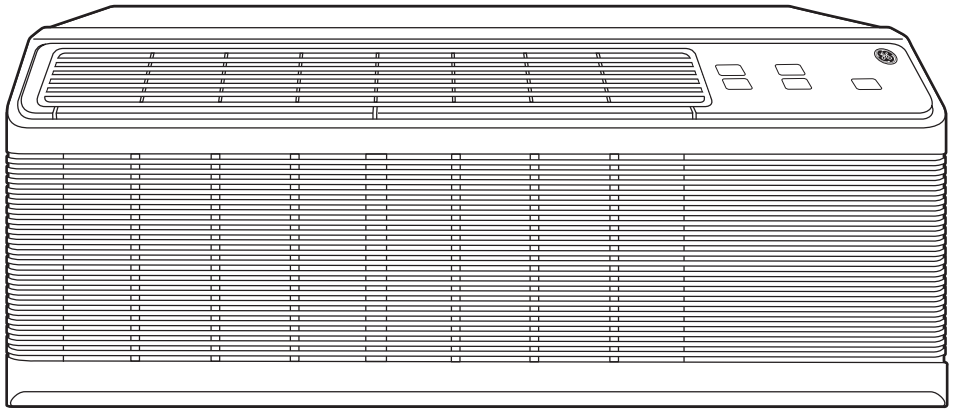

- Cooling Capacity - 7,200/7,200 BTU
- Energy Efficiency - 13.0/13.1 EER
- Dehumidification - 0.9 Pints/Hour
- Heat Pump Capacity - 6,500/6,400 BTU
- Heat Pump Efficiency - 4.1/4.2 COP
- Heat Pump Down to 25°F with Reverse Cycle Defrost
- Indoor Fan CFM (High/Low) - 335/240
- Electronic Touch Controls with LED Display
- Quiet Operation - Baked-On Mastic Sound Barrier, Cross Flow Blower and Two DC Fan Motors Create Less Noise to Ensure Comfort
- ICR (Internal Condensate Removal) Equipped - Reduces Condensate During Heat Pump Operation
- SMC Base Pan and Bulkhead - No Rusting and Helps Block Noise
- Heat & Freeze Sentinels - Keeps the Room from Overheating or Freezing
- Boost Heat Option - Provides Supplemental Resistance Heat in Heat Pump Mode
- Electronic Temperature Limiting - Prevents Expensive Over-Cooling or Over-Heating of the Room
- R 454B Refrigerant

*When Using the RAKVENT1 Kit

Projected Specifications. Subject to Change Without Notice.

GE APPLIANCES

For more information please visit our website at zoneline.com
or message Hospitality.Direct@geappliances.com.

Specification Revised 2/24

# AZHS07DRXXA

## GE Zoneline® Heat Pump Unit with ICR, 230/208 Volt

### Dimensions and Installation Information (In Inches)

**Electrical Wiring**
All wiring, including installation of receptacle, must be made in accordance with national and local electrical codes and regulations. Note: Aluminum wiring may pose special problems – consult a qualified electrician.


**Grille Options**
Stamped Aluminum Grille – RAG60 Exterior Architectural Louvers Durable Polycarbonate: RAG42PB (Beige), RAG42PM (Maple), RAG42PD (Dark Brown) Extruded Aluminum Architectural Grille – RAG42AA

**Retrofit Kits**
RAK40 – Deflector Kit to adapt chassis for use with non-GE exterior louvered grilles.

**Ducted Applications**
AZHS, AZES, & AZVS Series without make-up air can be used with ductwork to heat or cool more than one room. RAK6053 Duct Adapter is applied to the top of case over the air discharge. RAK601B Duct Extension is applied to right or left of adapter. Locally fabricated ductwork may be added to extend to maximum recommended straight distance of 15 feet in one direction.

**Electrical Connection**
230/208 volt units may be plugged into a receptacle. See Architects and Engineers Design Data Manual for electrical connection information including use of sub-base for direct connected units. Installation must comply with national and local electrical codes and regulations. Power connection kits are required on all Zoneline chassis.


**Wall Sleeve Dimensions**

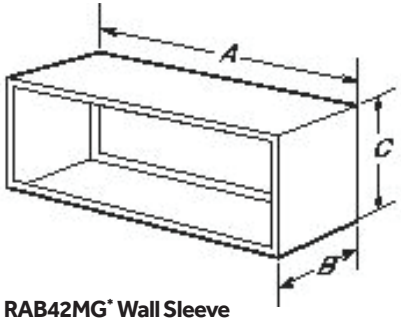


**RAB42MG* Wall Sleeve**
Heavy-gauge steel, 4 pc design with insulation. A–42", B–13-3/4", C–16" Also available in 16", 18", 20" and 24" depths

**RAB42PG Wall Sleeve**
4 pc fiberglass reinforced polyester compound with stainless steel locking components. A-42", B-14", C-16"

**Maximum Cord Extension**

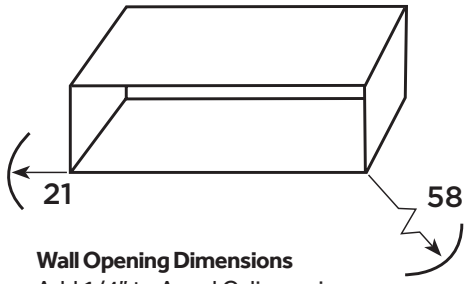


**Wall Opening Dimensions**
Add 1/4" to A and C dimensions for all cut-outs.
16-1/4" Min. H x 42-1/4" Min. W

| AZHS, AZES, AZVS Heater KW | | | | | | |
|---|---|---|---|---|---|---|
| 230/208 Volt | Line Cord (P), Direct (D) and Sub-Base Connected Units | | | | | |
| | 7K/9K | | | 12K/15K | | |
| Power Connection Kit | RAK315P<br>RAK315D*<br>RAK204D15C* | RAK320P<br>RAK320D*<br>RAK204D20C* | RAK330P<br>RAK330D*<br>RAK204D30C* | RAK315P<br>RAK315D*<br>RAK204D15C* | RAK320P<br>RAK320D*<br>RAK204D20C* | RAK330P<br>RAK330D*<br>RAK204D30C* |
| Total Watts | 2410/1990 | 3420/2830 | 4830/3990 | 2430/2020 | 3450/2860 | 4860/4020 |
| Heater Watts | 2400/1960 | 3400/2780 | 4800/3930 | 2400/1960 | 3400/2780 | 4800/3930 |
| Heater BTU | 8100/6600 | 11600/9400 | 16300/13400 | 8100/6600 | 11600/9400 | 16300/13400 |
| Total Amps | 10.5/9.6 | 14.9/13.6 | 21.0/19.2 | 10.6/9.7 | 15.1/13.8 | 21.2/19.3 |
| (MCA) | 15 | 20 | 30 | 15 | 20 | 30 |
| Recommended Protective Device (MOCP) | 15 amp Time-Delay Fuse or Breaker | 20 amp Time-Delay Fuse or Breaker | 30 amp Time-Delay Fuse or Breaker | 15 amp Time-Delay Fuse or Breaker | 20 amp Time-Delay Fuse or Breaker | 30 amp Time-Delay Fuse or Breaker |

*Per the NEC, use of this connection kit requires the purchase and use of the RAK4002D Junction Box.

GE APPLIANCES

For more information please visit our website at zoneline.com or message Hospitality.Direct@geappliances.com.

Specification Revised 2/24