7.3 cu. ft. Rear Control Top Load Dryer

- 7.3 cu. ft. Capacity
- 5 Cycles / 3 Options
- Sensor Dry System
- FlowSense™ Duct Clogging Indicator
- SmartDiagnosis™



COLOR AVAILABILITY
DLE6100W (Electric) – White
DLG6101W (Gas) – White
DLE6100M (Electric) – Monochrome Gray
DLG6101M (Gas) – Monochrome Gray

CAPACITY & MATCHING WASHER	
Capacity (cu. ft.)	7.3
Matching Washer	WT6105CW, WT6105CM
APPEARANCE	
Electronic Controls with LED Display	Yes
Touch Buttons	Yes
Dial-A-Cycle™	Yes
DRYER CYCLES	
Number of Cycles	5
Sensor Dry Cycles	Normal, Perm. Press, Heavy Duty, Delicates
Manual Dry Cycles	Air Dry
DRYER OPTIONS	
Number of Options	3
Options	Energy Saver, Control Lock, Damp Dry Signal
Temperature Settings	High, Medium, Low
Drying Levels	Very Dry, Normal Dry, Damp Dry
Manual Dry Times	60 min., 40 min., 20 min.
FABRIC CARE	
Sensor Dry	Yes
Precise Temperature Control with Variable Heater	Yes
Wrinkle Care Option	No
Steam Technology	No

CONVENIENCE	
EasyLoad™ Door	No
LoDecibel™ Quiet Operation	Yes
Drum Light	No
Control Lock	Yes
FlowSense™ Duct Clogging Indicator	Yes
End of Cycle Signal	Yes
Remaining Time Display / Status Indicator(s)	Yes
Reversible Door	Yes
Venting Option	Electric: 4 Way Venting Gas: 3 Way Venting
3 Minute Installation Check	Yes
Leveling Legs	4 Adjustable Legs
ADA Compliant	No
SMART FEATURES	
Wi-Fi Enabled	No
ThinQ® Technology	No
SmartDiagnosis™	Yes
MATERIALS AND FINISHES	
Drum Material	Aluminized Alloy Steel
Door / Trim	White
Cabinet	Painted Steel
TECHNICAL SPECS	
Electrical Requirements	Electric: 240V, 30 Amps Gas: 120V, 15 Amps
Gas Dryer BTU Rating	20,000
Power Outlet Location	Within 48" of Either Side
Plug Type	Gas: 3-Prong (Cord Included) Electric: 4-Wire (Cord Required)
ENERGY STAR® Certified	Yes
Combined Energy Factor (CEF)	Electric: 3.94 Gas: 3.49

OPTIONAL ACCESSORIES	
Drying Rack	3750EL0001C
LP Conversion Kit	383EEL3002D
Side Vent Kit	3911EZ9131X (Interchangeable with 383EEL9001B)

DIMENSIONS	
Product (W x H x D)	27" x 44 1/2" x 29 1/2"
Depth with Door Open	49 3/5"
Cutout Dimensions (W x H x D)	29" x 44 1/4" x 34 1/2" (31 1/2" D for Side or Bottom Venting)
Carton Dimensions (W x H x D)	28 7/8" x 46 1/2" x 31 3/8"
Approx. Weight (Product / Carton)	Electric: 111.3 lbs. / 115.7 lbs. Gas: 114 lbs. / 118.4 lbs.

LIMITED WARRANTY	
Parts and Labor	1 Year
Dryer Drum	3 Years (Parts Only)

DIMENSIONS / CLEARANCES

CLEARANCES FOR RECESSED AREA OR CLOSET INSTALLATION


The following spacing dimensions are recommended for this dryer. This dryer has been tested for clearances of 1 inch (2.5 cm) on the sides and rear. Recommended clearances should be considered for the following reasons:

- Additional clearances should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door and floor moldings.
- Additional clearances should be considered on all sides of the dryer to reduce noise transfer. For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Closet Ventilation Requirements

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm^2) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm^2) must be installed no more than one foot above the floor. Install vent grills in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

INSTALLATION SPACING FOR RECESSED AREA OR CLOSET

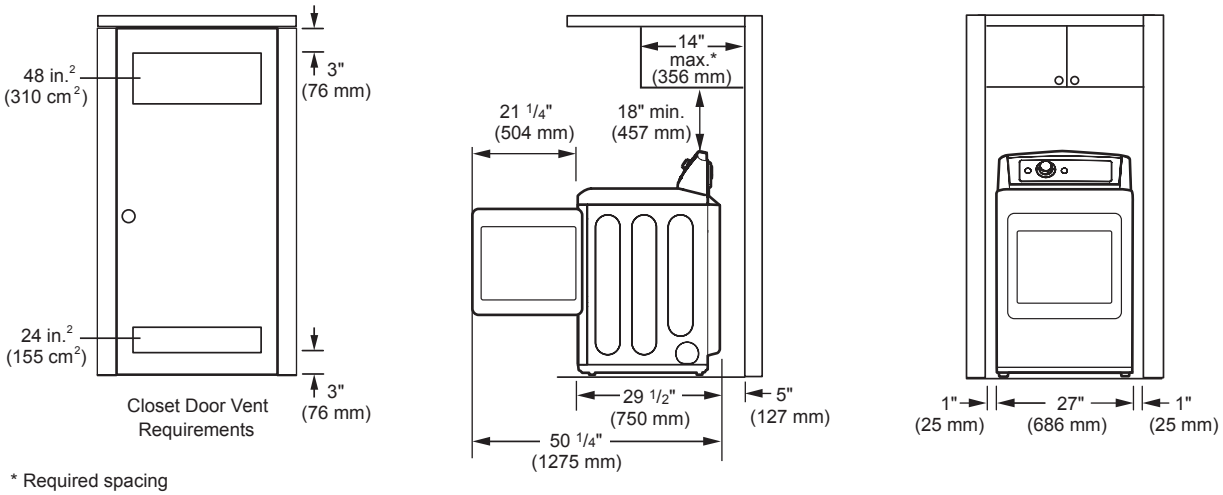


* Required spacing


DIMENSIONS / CLEARANCES


INSTALLATION SPACING FOR CABINET

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

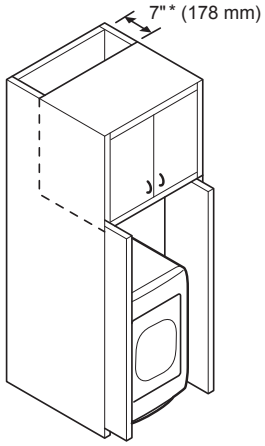

* Required spacing

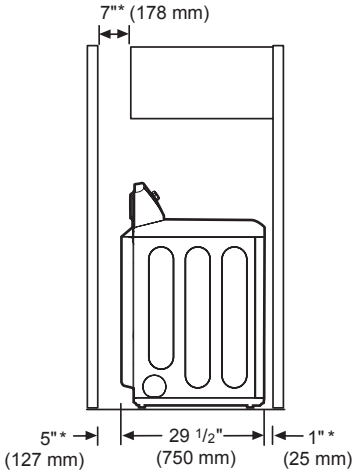

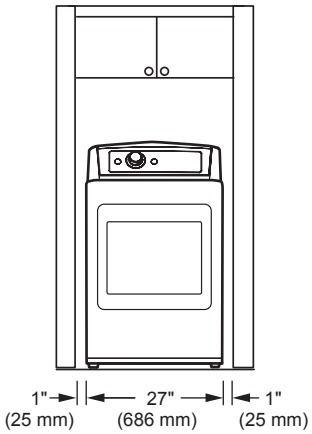



VENTING THE DRYER

- If connecting to existing ductwork, make sure it is suitable and clean before installing the dryer.
- Venting must conform to local building codes.
- Gas dryers MUST exhaust to the outdoors.
- Use only 4-inch (10.2 cm) rigid, semi-rigid or flexible metal ductwork inside the dryer cabinet and for venting outside.
- The exhaust duct must be 4 inches (10.2 cm) in diameter with no obstructions. The exhaust duct should be kept as short as possible. Make sure to clean any old ducts before installing your new dryer.
- Rigid, semi-rigid or flexible metal ducting is recommended for use between the dryer and the wall. All non-rigid metal transition duct must be UL-listed. Use of other materials for transition duct could affect drying time.
- Ductwork is not provided with the dryer. You should obtain the necessary ductwork locally. The vent hood should have hinged dampers to prevent backdraft when the dryer is not in use.
- The total length of flexible metal duct must not exceed 8 ft. (2.4 m).

NOTE:

- Deduct 6 ft. (1.8 m) for each additional elbow. Do not use more than four 90° elbows.

DUCTWORK

Wall Cap Type	Number of 90° Elbows	Maximum length of 4-inch diameter rigid metal duct
Recommended  	0	65 ft. (19.8 m)
	1	55 ft. (16.8 m)
	2	47 ft. (14.3 m)
	3	36 ft. (11.0 m)
	4	28 ft. (8.5 m)
Use only for short run installations 	0	55 ft. (16.8 m)
	1	47 ft. (14.3 m)
	2	41 ft. (12.5 m)
	3	30 ft. (9.1 m)
	4	22 ft. (6.7 m)

ROUTING AND CONNECTING DUCTWORK NOTE:

Follow the guidelines below to maximize drying performance and reduce lint buildup and condensation in the ductwork. Ductwork and fittings are NOT included and must be purchased separately.

- Use 4-inch (10.2 cm) diameter rigid, semi-rigid or flexible metal ductwork.
- The exhaust duct run should be as short as possible.
- Use as few elbow joints as possible.
- The male end of each section of exhaust duct must point away from the dryer.
- Use duct tape on all duct joints.
- Insulate ductwork that runs through unheated areas in order to reduce condensation and lint buildup on duct surfaces.
- Incorrect or inadequate exhaust systems are not covered by the dryer warranty. Dryer failures or service required because of such exhaust systems will not be covered by the dryer warranty.

CORRECT VENTING

