
Whirlpool® Compactor

PRODUCT MODEL NUMBERS


GC900QPK
GC900QPL
GC900QPP
GX900QPL
GX900QPP
TC800SPK
TU800SPK
TU800SPP

Electrical: 115-volt, 60-Hz, AC-only, 15- or 20-amp. grounded circuit is required. A time-delay fuse or circuit breaker and separate circuit is recommended.

OVERALL DIMENSIONS

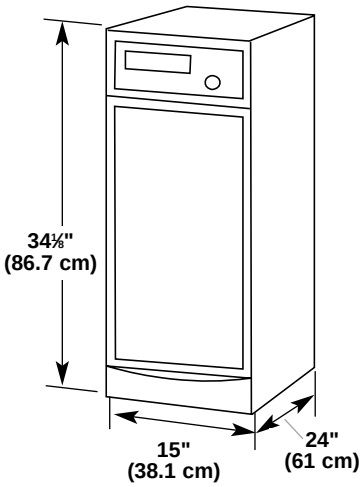


CABINET OPENING DIMENSIONS

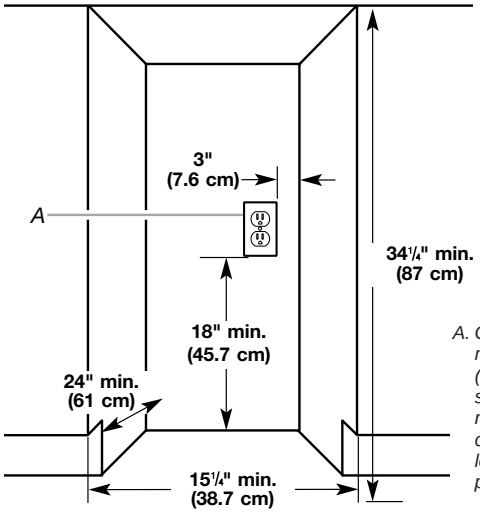

A. Grounded electrical outlet must be a minimum of 3 in. (7.6 cm) away from surrounding cabinets or nearby walls as shown. It can be placed either to the left or the right side of the product.

CLEARANCE DIMENSIONS

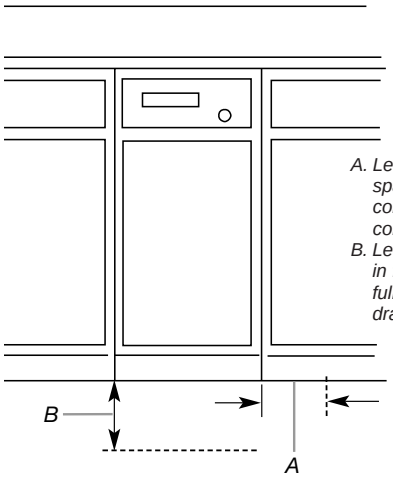


A. Leave 6 in. (15.2 cm) of clearance space to the right side of the compactor in order to remove the compactor bags.
B. Leave 23 in. (58.4 cm) of clearance in front of the compactor in order to fully open or remove the compactor drawer.

CUSTOM PANELS


With Trim Kit

Flat panel

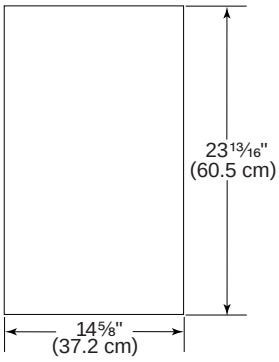

A 7/32 in. (5.6 mm) thick panel is required. This is the same thickness as a standard 1/4 in. plywood or paneling.

Raised panel

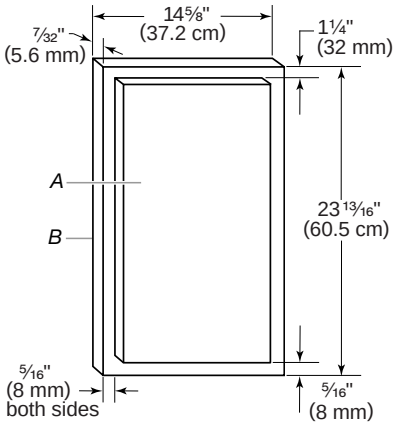


A. Raised panel or decorative trim
B. Outer section of panel

The outer section of panel must be 7/32 in. (5.6 mm) thick to fit into trim. Design raised panel sections using dimensions shown above.


Without Trim Kit

Models with handles

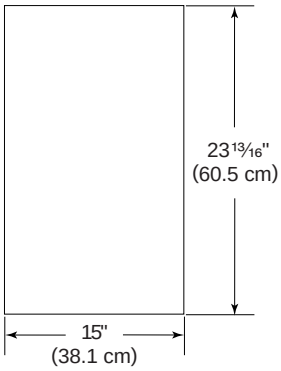

Panel should be 1/2 to 5/8 in. (13 to 16 mm) thick. NOTE: A thicker panel may need rounded front corners and a cutout for access to the handle.

Models without handles

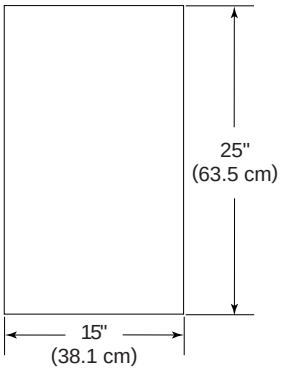

Panel should be 1/2 in. (13 mm) min. thickness

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. 9871676 Rev. C
11-16-04