
FRIGIDAIRE

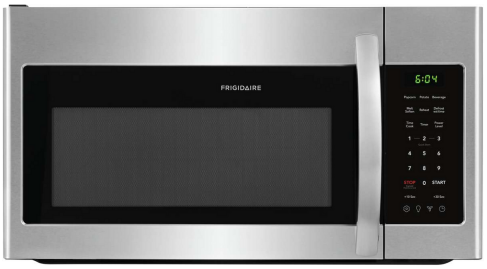

1.8 Cu. Ft. Over-The-Range Microwave

Over-The-Range Microwave

Available Products: FFMV1846VB, FFMV1846VD, FFMV1846VS, FFMV1846VW

Available Colors: Black, Black Stainless Steel, Stainless Steel, White

Version: 08/22

Product Specifications

Cooking Controls

Clock	Yes
Number of Power Levels	10
Cooking Power	1000 Watts

Ventilation System

Exhaust Fan Speeds	2
Removable Grease Filter	Yes

Internal Specifications

Turntable Diameter	12 41/100"

Dimensions and Volume

Height	16 3/8"
Width	29 7/8"
Depth	15 3/4"
Microwave Interior Height	10 9/16"
Microwave Interior Width	21 9/100"
Microwave Interior Depth	14 9/16"
Microwave Capacity	1.8 Cu. Ft.

Installation

Power Supply Connection Location	Right Top

Certifications and Approvals

ADA Compliant	No

Microwave Cooking

Beverage	Yes
Popcorn	Yes
Potato	Yes
Melt / Soften	Yes
Veggies	Yes

Microwave Control Features

+ 10 Seconds	Yes
+ 30 Seconds	Yes

Surface Light System

Lighting Type	LED
Number of Lights	1

Electrical Specifications

Voltage Rating	120 V

General Specifications

Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year


Safety Certifications and Approvals

UL Listed	Yes

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

1.8 Cu. Ft. Over-The-Range Microwave	Over-The-Range Microwave
Available Products: FFMV1846VB, FFMV1846VD, FFMV1846VS, FFMV1846VW	Available Colors: Black, Black Stainless Steel, Stainless Steel, White
Version: 08/22	

Installation Diagram

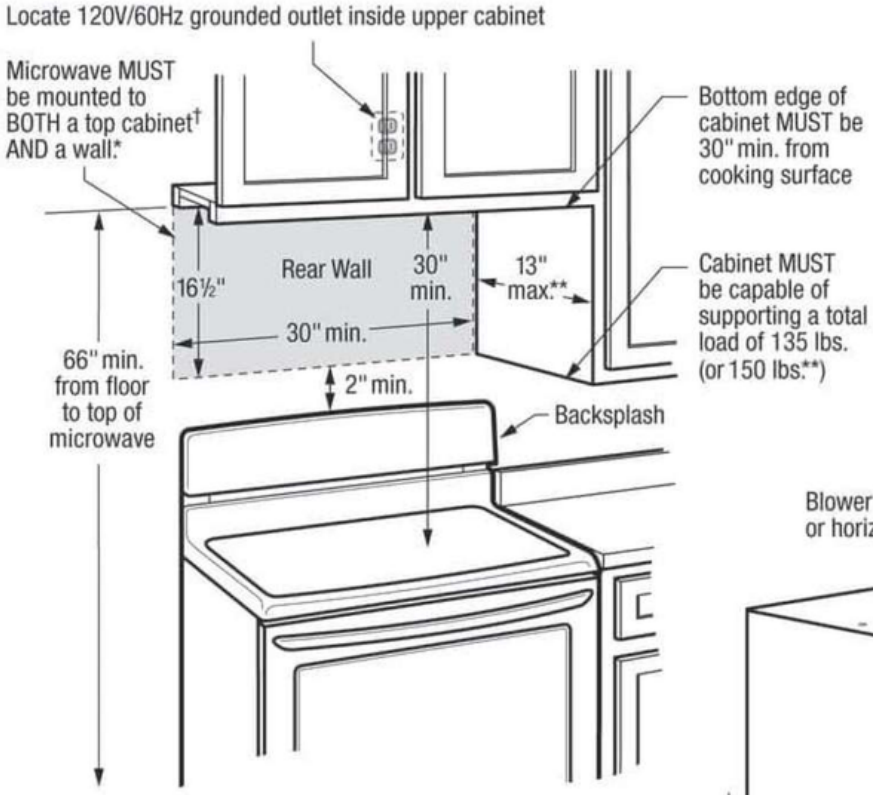

†When installing beneath smooth, flat cabinets, refer to cabinet template for detailed power cord clearance instructions

*Can NOT be installed in island or peninsula cabinet arrangements

**If cabinet depth (including doors) is deeper than 13", unit MUST be spaced out from rear wall using adequate materials (supporting 150 lbs.) to allow proper top vent air exhaust/intake

