BROAN®

Chimney

BWS1 SERIES

This sleek low-profile design is the perfect statement for today's kitchens. Available in stainless steel and black stainless-steel finishes. Bright LED lighting enhances your cooking experience, while the 3-speed backlit soft touch control makes operation easy.


SIZE	STAINLESS	BLACK STAINLESS	GREASE FILTERS (replacement)	NON-DUCTED CHARCOAL FILTERS
29-1/2 in.	BWS1304SS	BWS1304BLS	S97018027 (set of 2)	FILTERBWPTS (set of 2)


HVI PERFORMANCE

Duct Orientation	Size	Damper	Sones			CFM			
			Normal	Medium*	High	Normal	Medium*	High 0.25 in. w.g.	High 0.1 in. w.g.
Round - Vertical	6 in.	Included	3.0	5.5	8.5	240	350	385	400

FEATURES	
Max Blower Airflow	450 CFM
Finish	430 Stainless Steel no. 4 Brushed
Wall Mount	Yes
Telescopic Flue	Yes - Accomodates 8-ft. to 9-ft. ceilings
Convertible to non-ducted operation	Yes - Non-Duct Kit ARKBWS sold separately
Blower type	Single, Centrifugal
Cord-connected	Yes
Control type	Soft-Touch • Blower low speed • Blower medium speed • Blower high speed • Light on-off • 5-Minute delay
Lighting	2 x LED Modules 5.5 W, (included)
Grease Filters	Aluminum grease filters, dishwasher-safe with quick-release latch
AC INPUT	
120 V, 60 Hz - 2.6 AMPS	
OPTIONAL ACCESSORIES (sold separately)	
Flue Extension for 10-ft. ceiling	AEBWS (stainless steel), AEBWSBLS (black stainless steel)
Non-Duct Kit	ARKBWS
Airflow Reducer (< 300 CFM)	ARP6
MOUNTING HEIGHT	
26-in. from cooktop to bottom of hood	
LIMITED WARRANTY	
1-year *(See installation manual for full warranty text.)*	
FOR INDOOR USE ONLY	



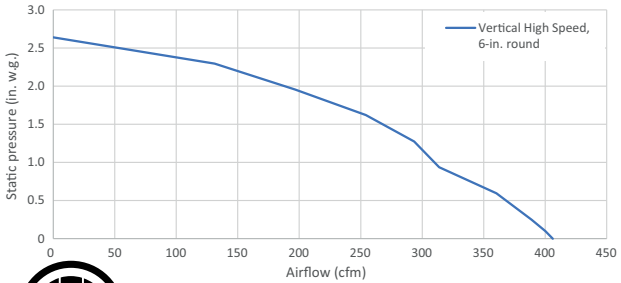

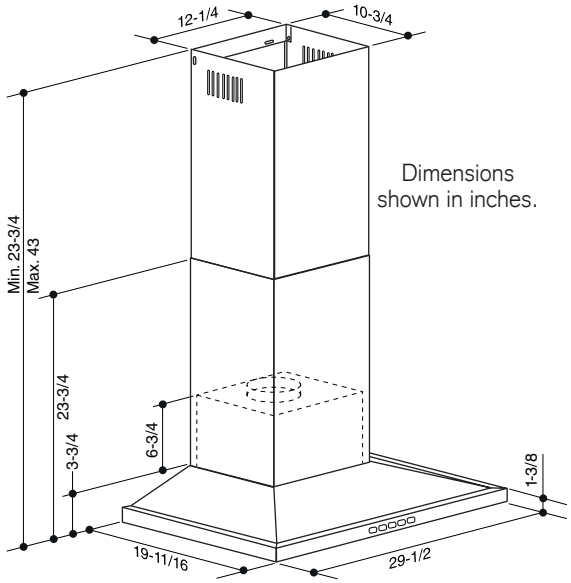

Dimensions shown in inches.

C ETL US LISTED Intertek

2100 HVI CERTIFIED

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

* Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.

SPECIFICATION SHEET
BWS1 SERIES

Broan-NuTone LLC | 926 West State Street, Hartford, WI 53027 | 1 800-558-1711 | www.broan-nutone.com
Venmar Ventilation ULC | 550 Lemire Blvd., Drummondville, Québec Canada J2C 7W9 | 1 877-896-1119 | www.broan-nutone.ca

BROAN®

Cheminée

SÉRIE BWS1

Son design épuré et profilé attire irrésistiblement le regard, quel que soit le style de votre cuisine. Finis offerts : acier inoxydable ou acier inoxydable noir. Son éclairage à DEL brillant améliore votre expérience culinaire, tandis que sa commande rétroéclairée à effleurement offre 3 vitesses de fonctionnement, facilitant l'utilisation.

LARGEUR	INOX	INOX NOIR	FILTRES À GRAISSE (remplacement)	FILTRES DE RECIRCULATION
29-1/2 po	BWS1304SS	BWS1304BLS	S97018027 (jeu de 2)	FILTERBWPTS (jeu de 2)

RENDEMENT HVI

Orientation du conduit	Largeur	Volet	Sones			pi³/min			
			Normale	Moyenne*	Haute	Normale	Moyenne*	Haute 0,25 po d'eau	Haute 0,1 po d'eau
Rond vertical	6 po	Inclus	3,0	5,5	8,5	240	350	385	400

CARACTÉRISTIQUES

Débit max. du ventilateur	450 pi³/min
Fini	Acier inoxydable n° 4 brossé
Installation murale	Oui
Cheminée télescopique	Oui - Convient aux plafonds de 8 pi à 9 pi de hauteur
Convertible pour une installation sans conduit	Oui - Ensemble pour hotte sans conduit ARKBWS vendu séparément
Type de ventilateur	Simple, centrifuge
Enfichable	Oui
Type de commande	À effleurement • Ventilateur basse vitesse • Ventilateur moyenne vitesse • Ventilateur haute vitesse • Éclairage allumé/éteint • Arrêt différé 5 minutes
Éclairage	2 x Modules DEL 5,5 W, (inclus)
Filtres à graisses	Filtres à graisses en aluminium, lavables au lave-vaisselle avec loquet à retrait rapide

ALIMENTATION CA

120 V, 60 Hz - 2,6 A

ACCESSOIRES OPTIONNELS (vendus séparément)

Cheminée télescopique pour plafonds de 10 pi	AEBWS (inox), AEBWSBLS (inox noir)
Ens. de recirculation	ARKBWS
Réducteur de débit (< 300 pi³/min)	ARP6

HAUTEUR DE MONTAGE

26 po au-dessus de la surface de cuisson


GARANTIE LIMITÉE

1 an


(Voir le manuel d'installation pour le texte complet de la garantie.)

POUR UTILISATION À L'INTÉRIEUR SEULEMENT



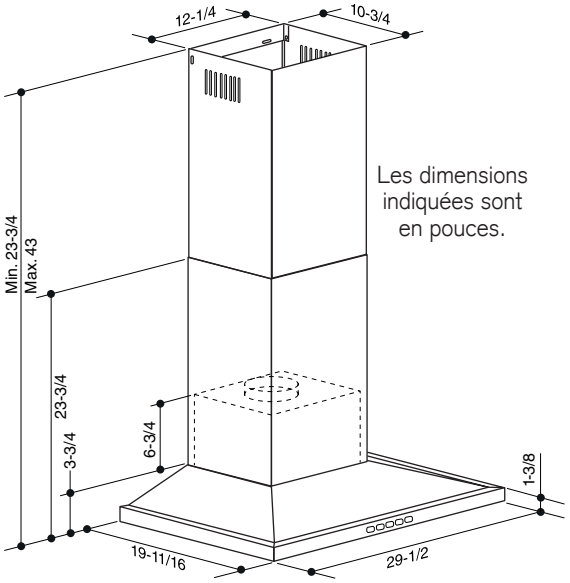

Les dimensions indiquées sont en pouces.

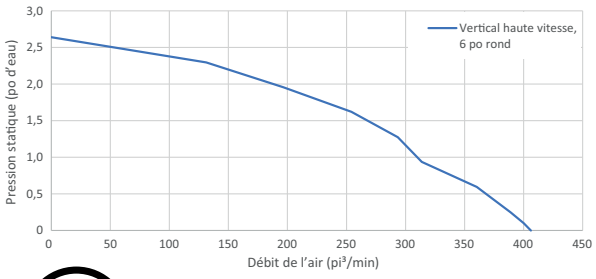

L'HOMOLOGATION HVI-2100 est conforme aux nouvelles techniques et procédures d'essai prescrites par le Home Ventilating Institute pour les produits d'emploi courant, dès leur disponibilité pour les consommateurs. Le rendement du produit est évalué à une pression statique de 0,1 po et de 0,25 po, d'après les tests effectués dans le laboratoire d'essai ultra-perfectionné de l'AMCA. Le sone est une mesure de la perception humaine de la puissance sonore, d'après des mesures effectuées en laboratoire.

* Signifie que la donnée n'est pas certifiée par le HVI, mais a été obtenue suivant les procédures de test standardisées du HVI.

FICHE TECHNIQUE
SÉRIE BWS1

99529071E

Broan-NuTone LLC | 926 West State Street, Hartford, WI 53027 | 1 800 558-1711 | www.broan-nutone.com

Venmar Ventilation ULC | 550 boul. Lemire, Drummondville, Québec Canada J2C 7W9 | 1 877 896-1119 | www.broan-nutone.ca