SHARP®



24" FLUSH MOUNT DEFLECTOR VENT: SKMD24F0AS

INSTALLATION INSTRUCTIONS

IMPORTANT NOTES TO THE INSTALLER

- Read all of the Installation Manual that is included with the Microwave Drawer before installing in the flush mount configuration.
- Observe all governing codes, ordinances, and safety instructions.
- Be sure to leave these instructions with the consumer.

Parts includes:

Qty.	Part number
1	PREF-B019MRP0 Flush Mount Deflector Vent 
2	LX-CZB055MRE0 Mounting screws 

1. Prepare cabinet opening as shown in Figures 1, 2A, 2B, 2C.

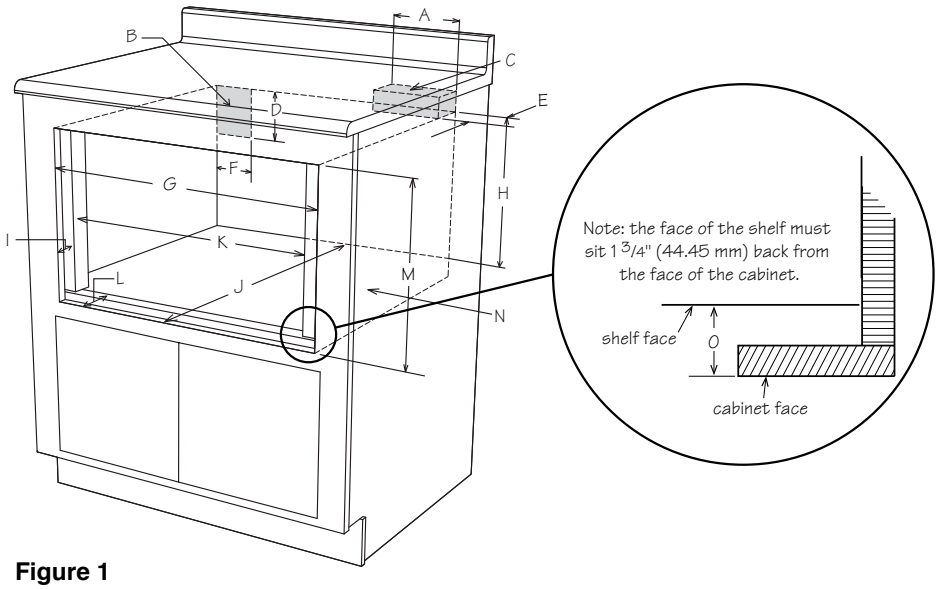


Figure 1

A. 6" (152.40 mm)
B. Suggested electrical outlet location
C. Anti-Tip block
D. 5" (127 mm)
E. 3-1/2" (88.90 mm)
F. 4" (101.60 mm)
G. 24-3/16" (614.35 mm) minimum
24-1/2" (622.3 mm) maximum
H. 14-13/16" (376.24 mm) to bottom of Anti-Tip block
I. 1-1/16" (26.97 mm)
J. 23-1/2" (596.90 mm) minimum depth
K. 22-1/8" (561.97 mm)
L. 1-3/4" (44.45 mm)
M. 16-7/8" (428.62 mm) opening
N. Floor must support 100 lb (45.4 kg)
O. 1-3/4" (44.45 mm)

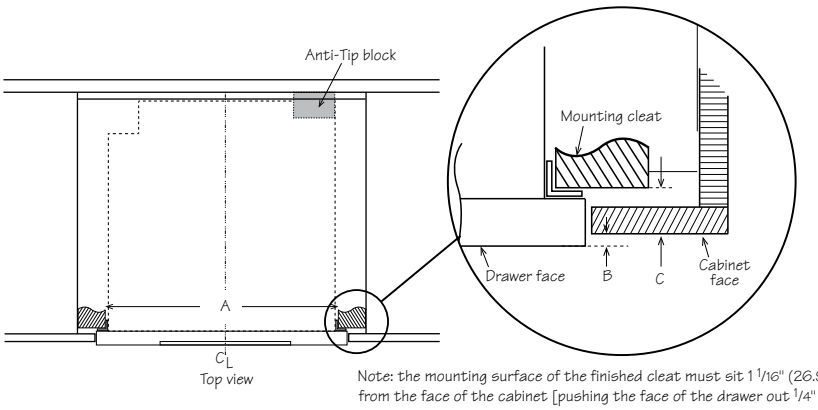


Figure 2A

A. 22" (558.8 mm) mounting cleat opening width
B. 1/4" (6.35 mm)
C. 1-1/16" (26.97 mm)

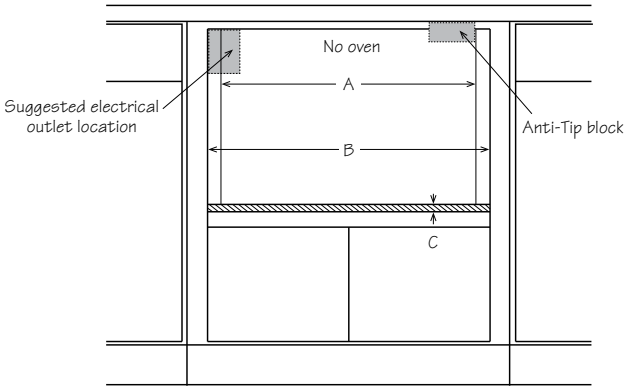


Figure 2B

A. 22-1/8" (561.97 mm) mounting cleat opening width
B. 24-3/16" (614.35 mm) minimum
   24-1/2" (622.3 mm) maximum
   flush opening width
C. 3/4" (19.05 mm) shelf

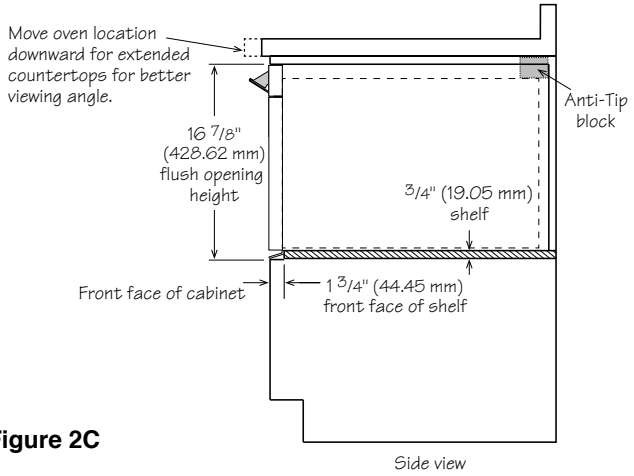


Figure 2C

2. Install deflector as shown in Figure 3A.

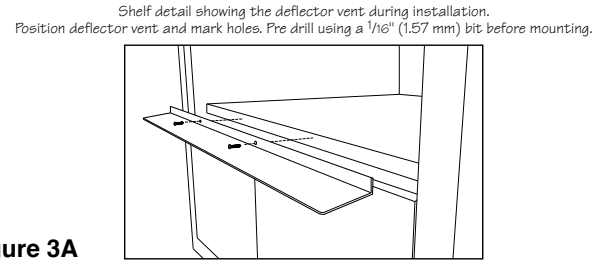


Figure 3A

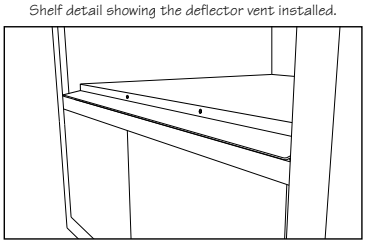


Figure 3B

3. Place the drawer adjacent to the wall or cabinet opening. Plug the power supply cord into the electrical outlet.
4. Carefully guide the drawer into the prepared opening. Avoid contact with the sides of the cutout opening and also pinching the cord between the oven and the wall.
5. Slide the drawer all the way back until the mounting flanges touch the cleats mounted in the cabinet opening.
6. Open the drawer. Using the 4 holes on the drawer as a template, pre drill the cabinet using a 1/16" (1.57 mm) bit. See Figure 4.


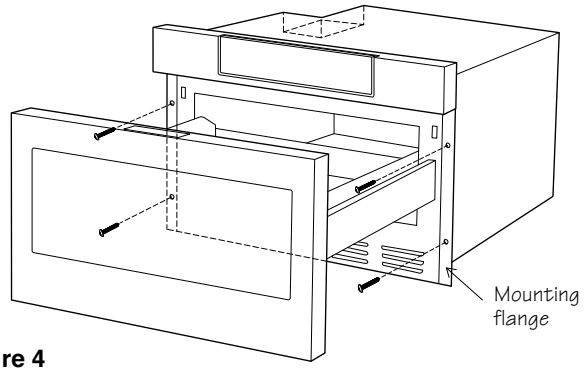


Figure 4

7. Secure the drawer with the 4 screws supplied.

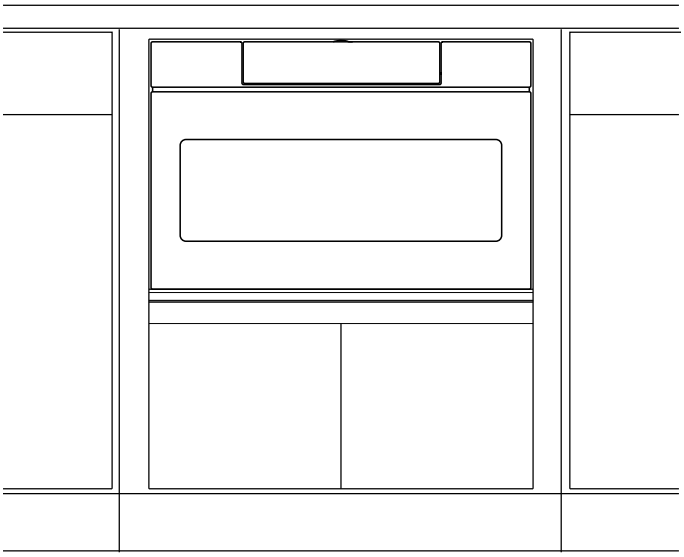

SHARP®



30" FLUSH MOUNT DEFLECTOR VENT: SKMD30F0AS

INSTALLATION INSTRUCTION

IMPORTANT NOTES TO THE INSTALLER

- Read all of the Installation Manual that is included with the Microwave Drawer before installing in the flush mount configuration.
- Observe all governing codes, ordinances, and safety instructions.
- Be sure to leave these instructions with the consumer.

Parts includes:

Qty.	Part number
1	PREF-B020MRP0 Flush Mount Deflector Vent 
2	LX-CZB055MRE0 Mounting screws 

1. Prepare cabinet opening as shown in Figures 1, 2A, 2B, 2C.


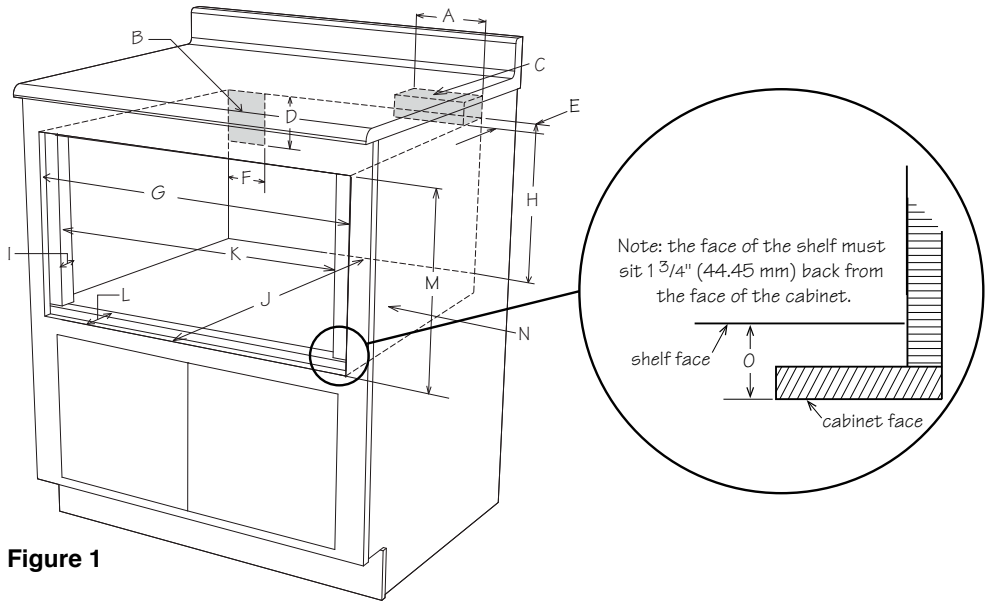


Figure 1

A. 6" (152.40 mm)
B. Suggested electrical outlet location
C. Anti-Tip block
D. 5" (127 mm)
E. 3-1/2" (88.90 mm)
F. 4" (101.60 mm)
G. 30-5/16" (769.92 mm) minimum
30-5/8" (777.87 mm) maximum
H. 14-13/16" (376.24 mm) to bottom of Anti-Tip block
I. 1-1/16" (26.97 mm)
J. 23-1/2" (596.90 mm) minimum depth
K. 28-7/16" (722.3 mm)
L. 1-3/4" (44.45 mm)
M. 16-7/8" (428.62 mm) opening
N. Floor must support 100 lb (45.4 kg)
O. 1-3/4" (44.45 mm)

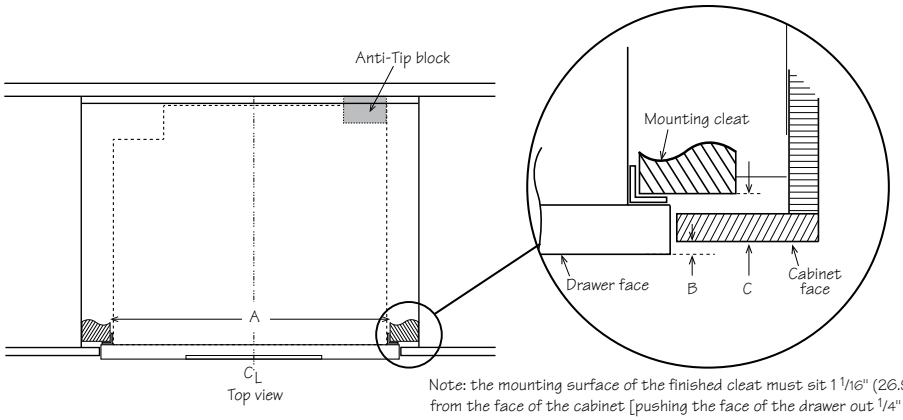

A. 28-1/2" (723.9 mm) mounting cleat opening width
B. 1/4" (6.35 mm)
C. 1-1/16" (26.97 mm)

Figure 2A

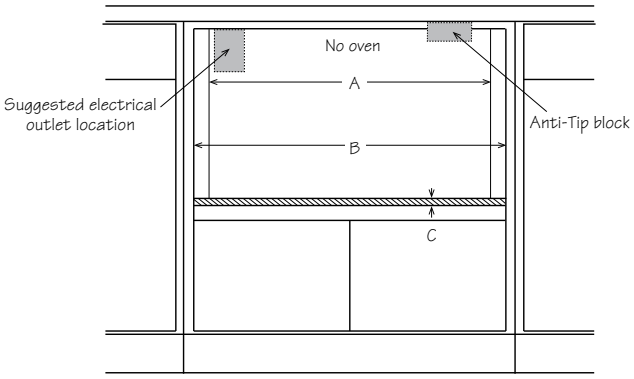


Figure 2B

A. 28-7/16" (722.3 mm) mounting cleat opening width
B. 30-5/16" (769.92 mm) minimum
30-5/8" (777.87 mm) maximum
flush opening width
C. 3/4" (19.05 mm) shelf

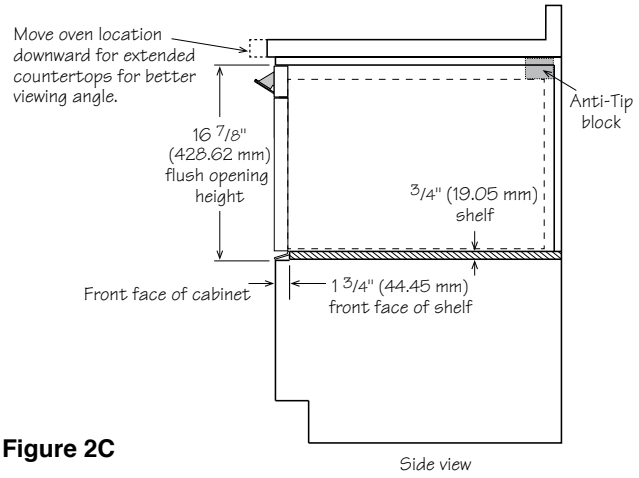


Figure 2C

2. Install deflector as shown in Figure 3A.

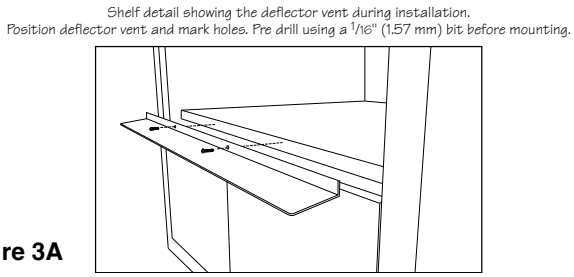


Figure 3A




Figure 3B

3. Place the drawer adjacent to the wall or cabinet opening. Plug the power supply cord into the electrical outlet.
4. Carefully guide the drawer into the prepared opening. Avoid contact with the sides of the cutout opening and also pinching the cord between the oven and the wall.
5. Slide the drawer all the way back until the mounting flanges touch the cleats mounted in the cabinet opening.
6. Open the drawer. Using the 4 holes on the drawer as a template, pre drill the cabinet using a 1/16" (1.57 mm) bit. See Figure 4.


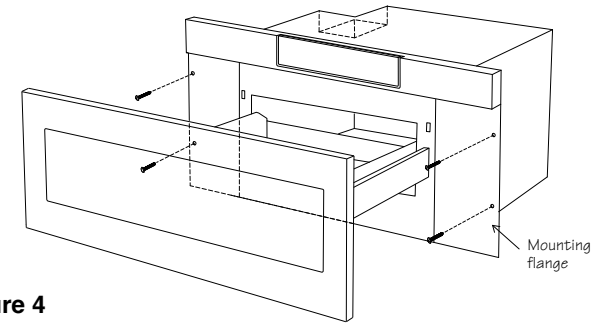


Figure 4

7. Secure the drawer with the 4 screws supplied.

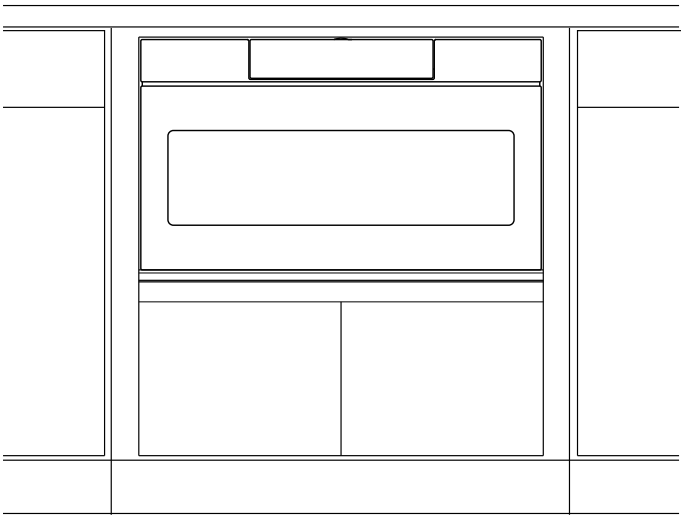

SHARP®
1 Sharp Plaza Suite 1, Mahwah, New Jersey 07495-1123, USA • 1-800-BE-SHARP (237-4277)
335 Britannia Road East, Mississauga, Ontario, L4Z 1W9, Canada