# Café Minimal Series 30" Smart Built-In Convection Double Wall Oven in Platinum Glass

CTD90DM2NS5



This model requires a one-time WiFi connection to download oven features and functionality enabled by software. Follow instructions on your LCD screen on how to connect.

## FEATURES & BENEFITS

**Built-In WiFi, Powered by SmartHQ™ App**- Manage all aspects of your kitchen with the help of the SmartHQ™ App or your voice assistant.

**Personalized Features + Upgrades*** - Usher in the latest features by downloading cooking upgrades right to your oven, putting Air Fry and more in your repertoire.

Create an easy-to-clean, contemporary look for your kitchen with the striking reflective glass finish.

Simply **use your voice*** to open the wall oven, so you can keep both hands on heavy dishes.

Monitor your food from your smart device thanks to a heat-resistant **in-oven camera***, which syncs to the SmartHQ™ app.

Simplify the cooking process with **precision cooking modes** that automatically track progress, and make time and temperature adjustments.

Integrated **hot air frying** technology gives you crispy results in your oven without using oil.

Make homemade chips, spices and dehydrated fruits more easily than ever with a **moisture-removing setting** in your oven.

Eliminate the need for preheating and save time with a variety of **precision cooking modes**.

This oven features **True European Convection**, an advanced convection system that uses a third heating element and reversing fan for the highest level of heat and air circulation.

A precision **temperature probe** connects to the oven to ensure your food is properly cooked.

This oven will fit your existing cut-out, or GE Appliances will help pay for modifications up to $300.

*Some features require continuous WiFi connection to use.

## FEATURES

| | |
|---|---|
| Configuration | Double Oven |
| Cooking System | True European Convection with Direct Air (Both Ovens) |
| Oven Cleaning Type | Self-Clean with Steam Clean Option |
| Cleaning Time | Variable with Delay Clean Option |
| Oven Cooking Modes | Convection Bake; Convection Bake Multi-Rack; Convection Broil Hi/Lo; Convection Roast; Precision Cooking Modes; Thermal Bake; Thermal Broil Hi/Lo |
| Self-Clean Oven Door Lock | Automatic |
| Control Type | 7" Full-Color Touch LCD Screen |
| Oven Features | 10-Pass Bake Element; 10-Pass Dual Broil Element; Closed Door Broiling |
| Oven Rack Features | 2 Self-Clean Roller Racks (Both Ovens); 6 Embossed Rack Positions (Both Ovens) |
| Oven Control Features | 12-Hour Shut-Off Capability; Audible Preheat Signal; Auto Recipe Conversion; Certified Sabbath Mode; Control Lock Capability; Cook Time; C° or F° Programmable; Dehydration; Delay Time; Electronic Clock & Kitchen Timer; Mis-Wire Detection; Oven Camera; Proof Mode; Remote Enabled; Scan-to-Cook Temperature Probe; Warm Mode |
| WiFi Connect | Built-In |
| Connected Capabilities | Amazon Alexa; The Google Assistant; IFTTT; Fresco Innit; Sonos; Google Home |
| Cooking Technology | Convection |
| Oven Interior | 2 Halogen Interior Oven Lights (Both Ovens); Black Gloss Finish; Hidden Bake |

## CAPACITY

| | |
|---|---|
| Capacity (Cu. Ft.) | 5.0 Upper / 5.0 Lower |
| Total Capacity (cubic feet) | 10.0 cu ft |

## POWER / RATINGS

| | |
|---|---|
| Amp Rating at 208V | 40 |
| Amp Rating at 240V | 40 |
| Bake Wattage | 2,850W |
| Broiler Wattage | 4,300W |
| Convection Wattage | 2,400W |
| KW Rating at 208V | 6.8 |
| KW Rating at 240V | 9 |

## WEIGHTS & DIMENSIONS

| | |
|---|---|
| Approximate Shipping Weight | 278 lb |
| Net Weight | 260 lb |
| Overall Height | 53 in |
| Overall Width | 29-3/4 in |
| Overall Depth | 24-3/4 in |
| Cabinet Width | 30 in |
| Cutout Dimensions (w x h x d) (in.) | 28-1/2 x 51-13/16 x 23-1/2 |
| Oven Interior Dimensions (lower) | 25 x 17-3/8 x 20-1/4 |
| Oven Interior Dimensions (upper) | 25 x 17-3/8 x 20-1/4 |

## APPEARANCE

| | |
|---|---|
| Color Appearance | Platinum Glass |
| Handle | Push-to-Open, Soft Open Hinges |
| Installation | Above Warming Drawer; Side-by-Side; Flush Inset |

# Café Minimal Series 30" Smart Built-In Convection Double Wall Oven in Platinum Glass

CTD90DM2NS5

## WARRANTY

| | |
|---|---|
| Parts Warranty | Limited 1-Year Entire Appliance |
| Labor Warranty | Limited 1-Year Entire Appliance |
| Warranty Notes | See Written Warranty For Full Details |


## DIMENSIONS AND INSTALLATION INFORMATION


Wall coverings, countertops and cabinets surrounding the wall oven must be able to withstand a temperature of up to 200°F (94°C).


If the cabinet in which the wall oven is installed does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. The runners and braces must support up to 400 lbs (181 kg).

**ATTENTION INSTALLER:** Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

**IMPORTANT:** Before installing, consult installation instructions packed with product for current dimensional data.

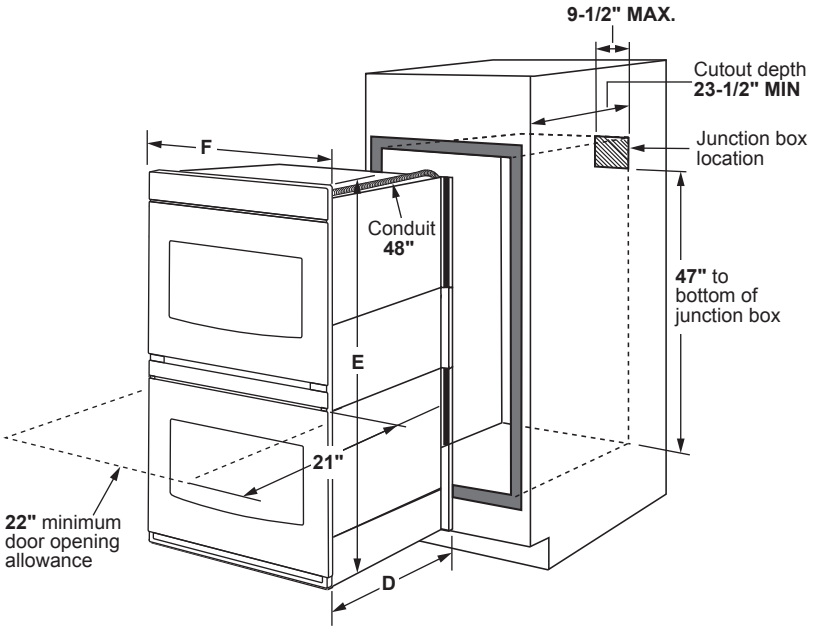

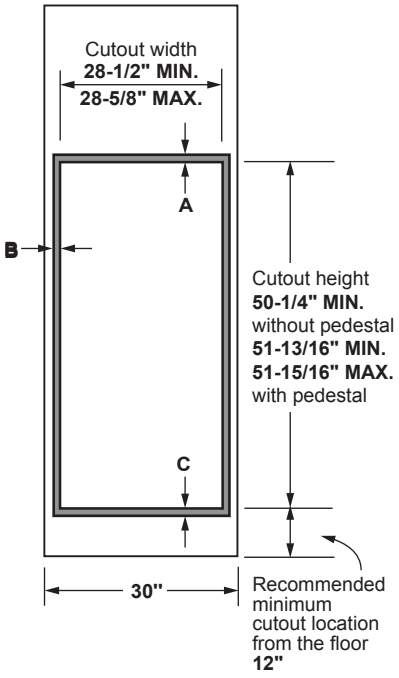
| Cabinet | 30" |
|---|---|
| A - Overlap of oven at top of cutout | 1" |
| B - Overlap of oven other side of edge of cutout | 3/4" |
| C - Overlap of oven at bottom of cutout | 1-1/4" |
| **Oven** | |
| D - Install depth | 24-3/4" |
| E - Overall height with trim | 53" |
| F - Overall width | 29-3/4" |

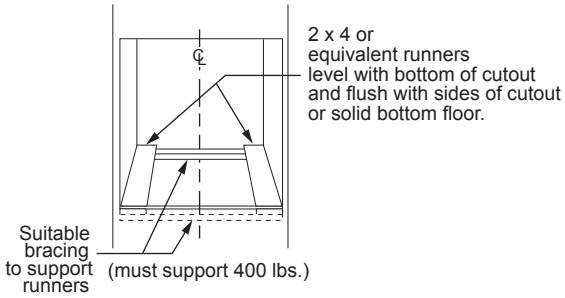**Dimension and installation information are shown in inches.**

# Café Minimal Series 30" Smart Built-In Convection Double Wall Oven in Platinum Glass

CTD90DM2NS5

## DIMENSIONS AND INSTALLATION INFORMATION

30" double electric wall ovens are approved for installation above 27" and 30" warming drawers.


**WHEN TO USE THE PEDESTAL RAILS:** When replacing an older GE Appliances 30" double wall oven with a new GE Appliances model. Cutout height =51-13/16" to 51-15/16". This is our traditional cutout height.

**WHEN NOT TO USE THE PEDESTAL RAILS:** When replacing a 30" double wall oven from another manufacturer (i.e., Whirlpool) with a new GE Appliances model. Cutout height = 50-1/4". You will need to verify that the existing cutout matches the 50-1/4" dimension.

If the new GE Appliances 30" double wall oven is being installed into new construction (i.e., not a replacement), then the recommended installation is to use the pedestal rails.

**ATTENTION INSTALLER:** Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

**IMPORTANT:** Before installing, consult installation instructions packed with ALL products for current dimensional and combination data.

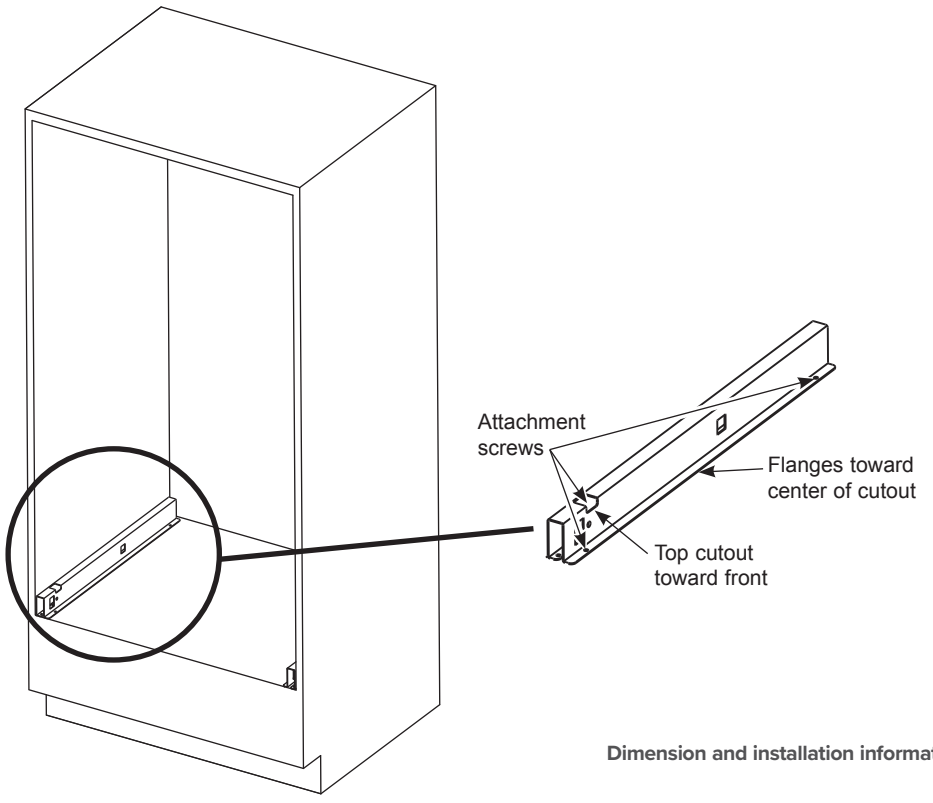


**Dimension and installation information are shown in inches.**

# Café Minimal Series 30" Smart Built-In Convection Double Wall Oven in Platinum Glass

CTD90DM2NS5

## FLUSH INSET DIMENSIONS AND INSTALLATION INFORMATION

**NOTES:**

A Junction Box location (may also be located in an adjacent cabinet).


B Platform must be able to support 400 lbs (181 kg).

C Cabinet surfaces must be an appearance finished surface for flush installation.


D Cleats may be visible and should be finished to match cabinetry.

**ATTENTION INSTALLER:** Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

**IMPORTANT:** Before installing, consult installation instructions packed with ALL products for current dimensional and combination data.

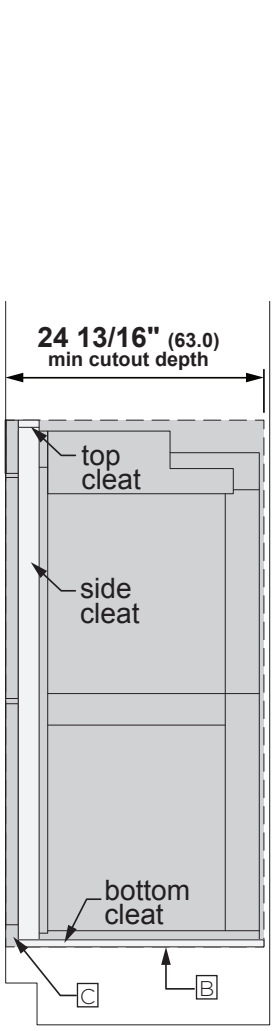


FLUSH INSET INSTALLATION

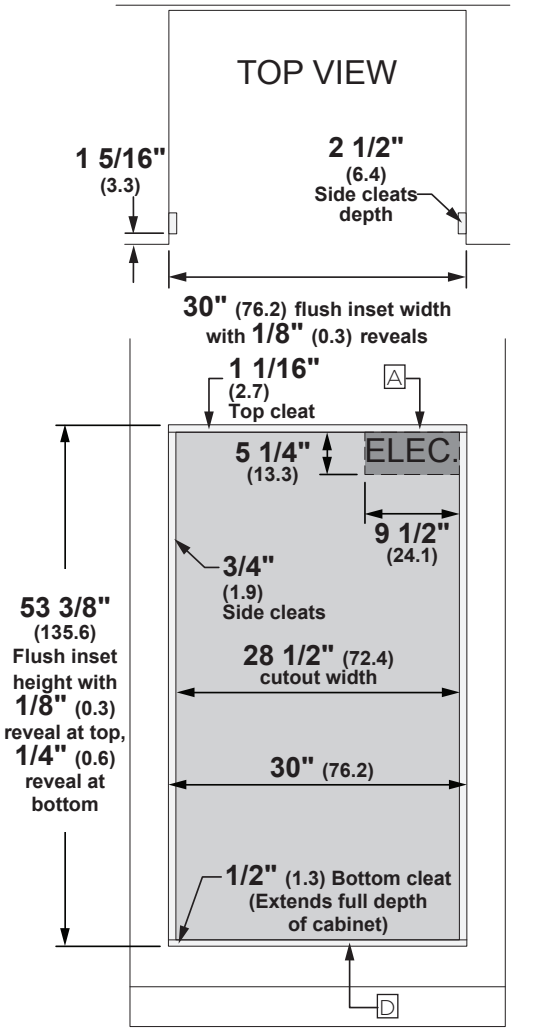


FLUSH INSET INSTALLATION FRONT VIEW

Allow 1/8" (0.3) clearances from side edges of oven door.

**Dimension and installation information are shown in inches.**



© 2025 GE Appliances 